

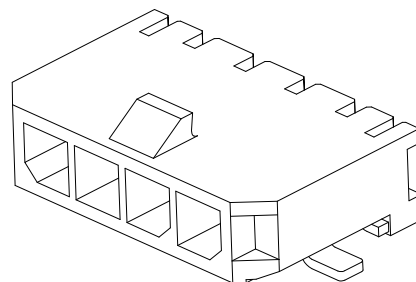
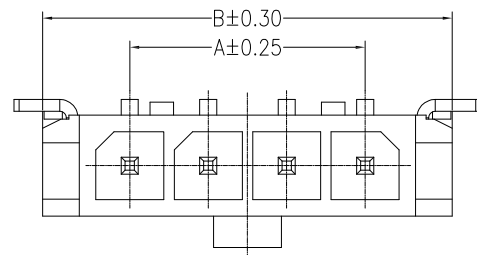
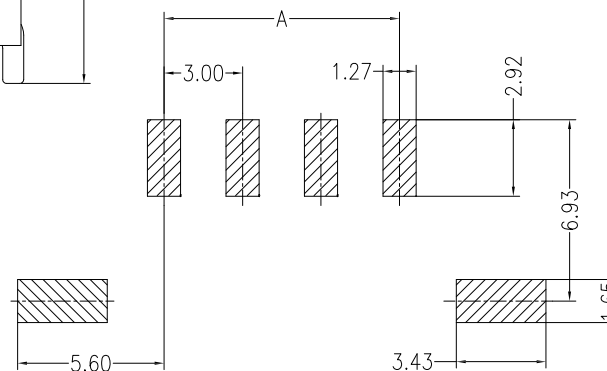
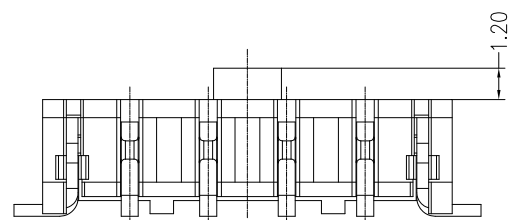


环保物料

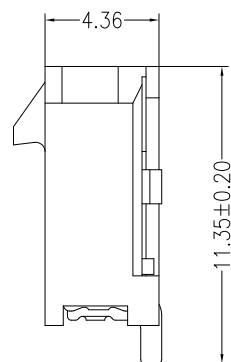

Specifications:
 Contact resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 1000M\Omega$
 Rated voltage: 250V AC DC
 Rated current: 5.0A AC DC
 Withstand Voltage: 1000V AC/minute
 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$
 Housing: LCP UL94V-0, BLACK
 Contacts: Brass/MATTE Sn-plated
 Solder Tabs: Brass/MATTE Sn-plated

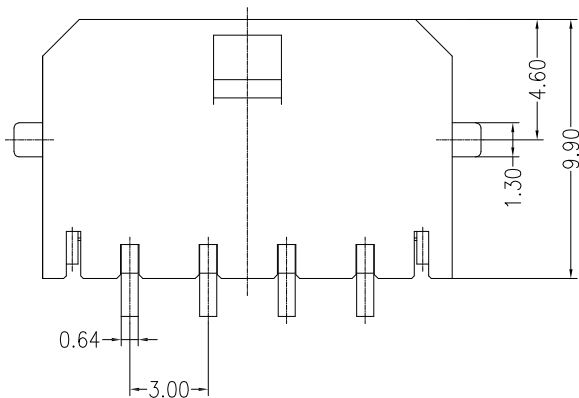

PCB LAYOUT(Tolerance: ± 0.05)

PIN	DIM A	DIM B
2	3.00	9.65
3	6.00	12.65
4	9.00	15.65
5	12.00	18.65
6	15.00	21.65
7	18.00	24.65
8	21.00	27.65
9	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

GENERAL TOLERANCES		SCALE:	NAME	DATE	 康导新能源 网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850176986@qq.com 传真: 0769-85392827	PART. NO:		
LINEAR	ANGLES	1:1	黎腾	2017.06.16		23001AWR		
0.0 \pm 0.35	X° REF \pm 6°	APPROVED	肖坤权	2017.06.16		DWG. NO:		
0.00 \pm 0.25	X° \pm 3°	DESIGNER	旷淇	2017.06.16		REV: A0 SHEET: 1/1		
REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	0.000 \pm 0.15		X° X' \pm 2°	
TITLE:		3.00mm PITCH 90° WAFER SMT TYPE						