
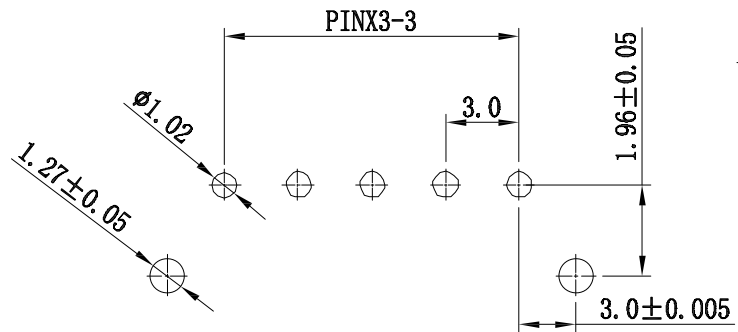




环保物料

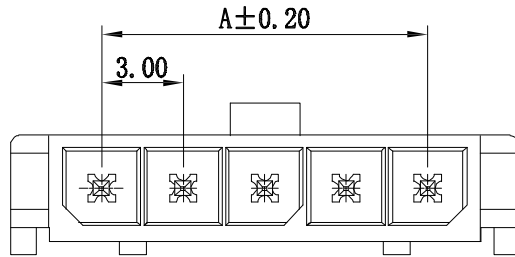

Specifications:

Contact resistance: $\leq 20\text{m}\Omega$
 Insulation resistance: $\geq 1000\text{M}\Omega$
 Rated voltage: 250V AC DC
 Rated current: 5.0A AC DC
 Withstand Voltage: 1000V AC/minute
 Temperature Range: $-25^\circ\text{C} \sim +85^\circ\text{C}$

P. C. B LAYOUT

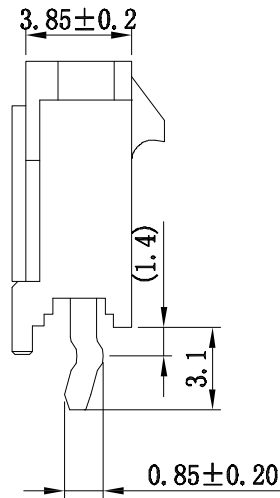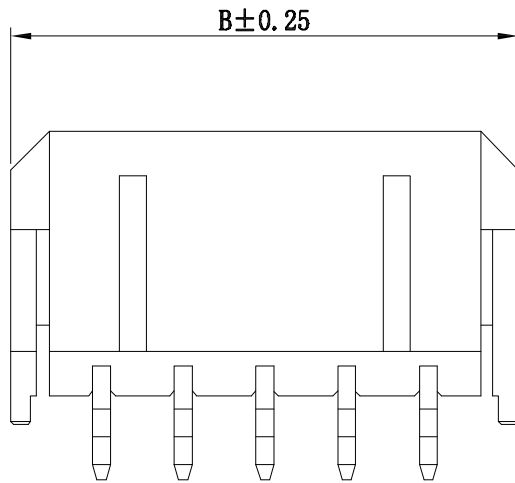

Poles	Dimensions mm	
	A	B
2	3.00	9.65
3	6.00	12.65
4	9.00	15.65
5	12.00	18.65
6	15.00	21.65
7	18.00	24.65
8	21.00	27.65
9	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

序号	图号	名称	材料	数量	附注
3		Press-fit	Brass Tin	2	
2		Contact	Brass Tin	N	
1		Housing	PA9T (UL94V-0)	1	Black

GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850176986@qq.com 传真: 0769-85392827	PART. NO: 23001AWVB			
LINEAR	ANGLES	1:1	APPROVED	黎腾			DWG. NO:		
0.0±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16					
0.00±0.25	X° ±3°	DRAWN	旷淇	2017.06.16					
REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	0.000±0.15	X° X'±2°	TITLE: 3.00mmPITCH 180° WAFER DIP TYPE	REV: A0	SHEET: 1/1