

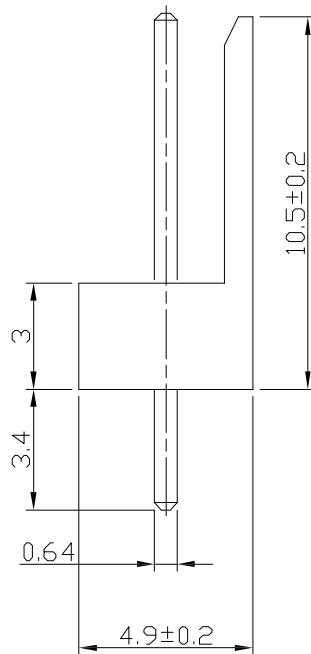


环保物料

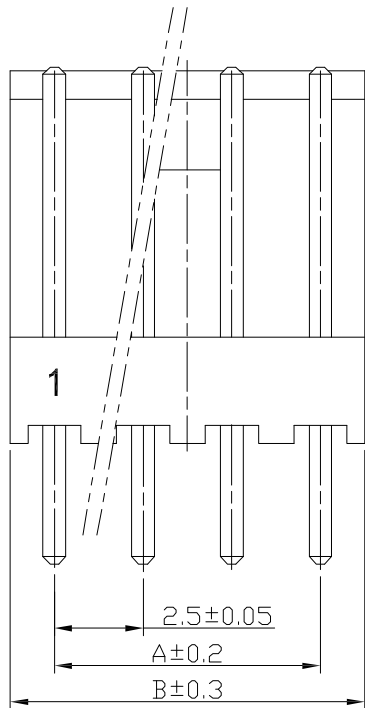


主要技术参数 Main Specifications

线数 (Poles): 02~24
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 3.0A AC DC
 耐电压 (Withstand Voltage): 1000V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

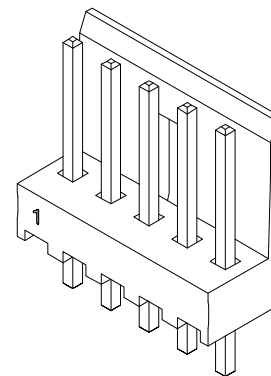

| Poles | Dimensions mm | |
|-------|---------------|-------|
| | A | B |
| 2 | 2.50 | 5.00 |
| 3 | 5.00 | 7.50 |
| 4 | 7.50 | 10.00 |
| 5 | 10.00 | 12.50 |
| 6 | 12.50 | 15.00 |
| 7 | 15.00 | 17.50 |
| 8 | 17.50 | 20.00 |
| 9 | 20.00 | 22.50 |
| 10 | 22.50 | 25.00 |
| 11 | 25.00 | 27.50 |
| 12 | 27.50 | 30.00 |
| -- | -- | -- |
| 24 | 57.50 | 60.00 |

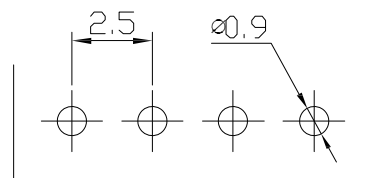

P. C. B LAYOUT

| ITEM | COMPONENT | Q'TY | MATERIAL | FINISH |
|------|-----------|----------|----------|-------------|
| B | CONTACT | 2~15 PCS | Brass | Tin-plated |
| A | PEDESTAL | 1 PCS | PA66 | COLOR:WHITE |

| REV. | REVISION RECORD | DATE | UNIT: MM | SIZE: A4 | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE |
|------|-----------------|------------|----------|----------|--------------------|----------|------------|------|------------|
| | | | | | LINEAR | ANGLES | | | |
| A0 | 新图面发行 | 2017.06.16 | MM | A4 | 0.00±0.25 | X° ±3° | APPROVED | 黎腾 | 2017.06.16 |
| | | | | | 0.00±0.15 | X° X'±2° | DESIGNER | 肖坤权 | 2017.06.16 |
| | | | | | | | DRAWN | 旷淇 | 2017.06.16 |

康导新能源
 网址: www.dgconne.com 电话: 0769-85337633
 邮箱: 2850175988@qq.com 传真: 0769-85392827

| | | |
|-----------|--------|------------|
| PART. NO: | 22510A | |
| DWG. NO: | | |
| REV: | A0 | SHEET: 1/1 |