
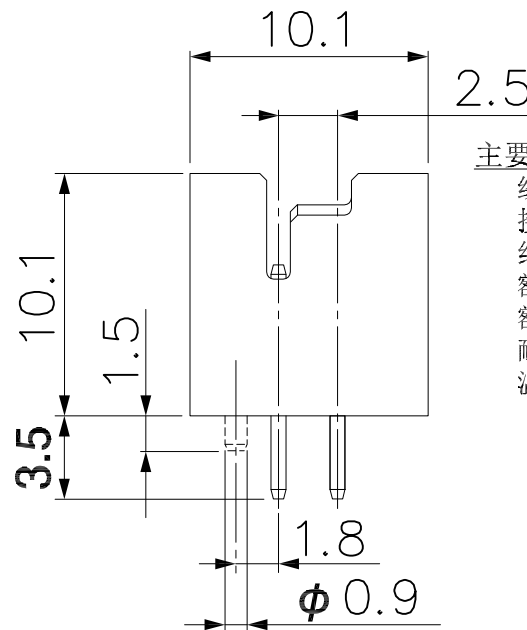



环保物料

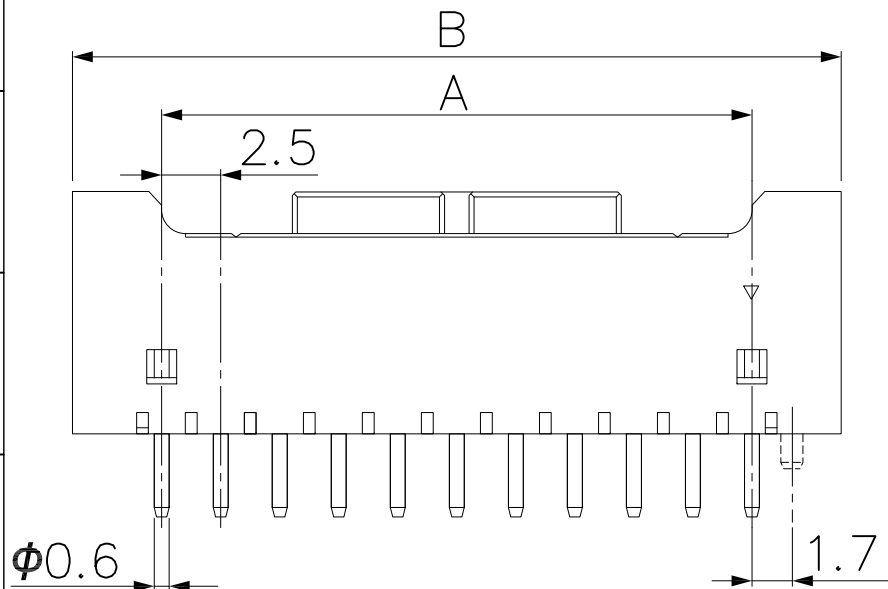


主要技术参数 Main Specifications

线 数 (Poles): 08~40  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 250V AC DC  
 额定电流 (Rated current): 3.0A AC DC  
 耐 电压 (Withstand Voltage): 1000V AC/minute  
 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

PIN	Dimensions	
	A	B
2*4P	7.50	15.00
2*5P	10.00	17.50
2*6P	12.50	20.00
2*7P	15.00	22.50
2*8P	17.50	25.00
2*9P	20.00	27.50
2*10P	22.50	30.00
2*11P	25.00	32.50
2*12P	27.50	35.00
2*13P	30.00	37.50
2*14P	32.50	40.00
2*15P	35.00	42.50
2*16P	37.50	45.00
2*17P	40.00	47.50
2*18P	42.50	50.00
2*20P	47.50	55.00

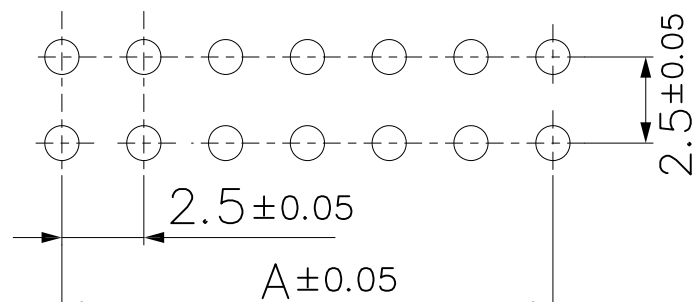

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
B	CONTACT	2~15 PCS	Brass	Tin-plated
A	PEDESTAL	1 PCS	PA66	COLOR:WHITE

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康 导 新 能 源	PART. NO:	
				LINEAR	ANGLES					22507A	
A0	新图面发行	2017.06.16	MM	0.00 ± 0.25	X° ± 3°	APPROVED	黎腾	2017.06.16	 康 导 新 能 源 网址: www.dgonns.com 电话: 0769-85337633 邮箱: 2850176988@qq.com 传真: 0769-85392827	DWG. NO:	
	REVISION RECORD		A4	0.000 ± 0.15	X° X' ± 2°	DESIGNER	肖坤权	2017.06.16		REV: A0 SHEET: 1/1	
						DRAWN	旷淇	2017.06.16	TITLE: 2.50mmPITCH 180° WAFER DIP TYPE		