

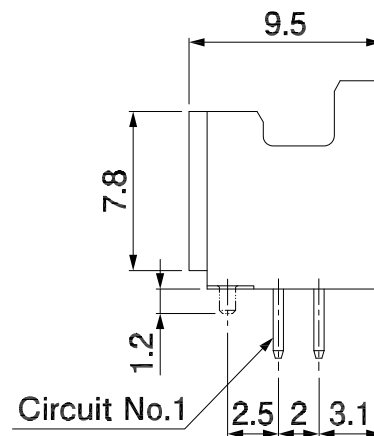


环保物料

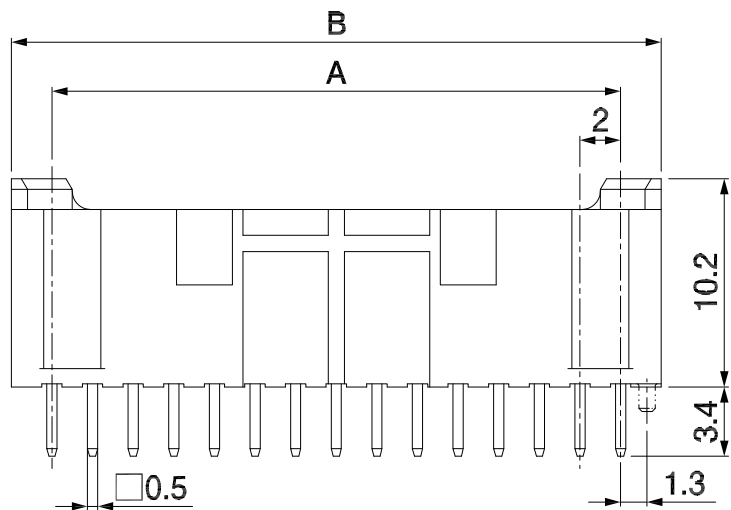

Specifications:

Contact resistance:  $\leq 20\text{m}\Omega$   
 Insulation resistance:  $\geq 1000\text{M}\Omega$   
 Rated voltage: 125V AC DC  
 Rated current: 3.0A AC DC  
 Withstand Voltage: 500V AC/minute  
 Temperature Range:  $-40^\circ\text{C} \sim +105^\circ\text{C}$   
 Housing: POLYAMIDE(PA) BLACK, UL94V-0  
 Contacts: Brass / GOLD-plated

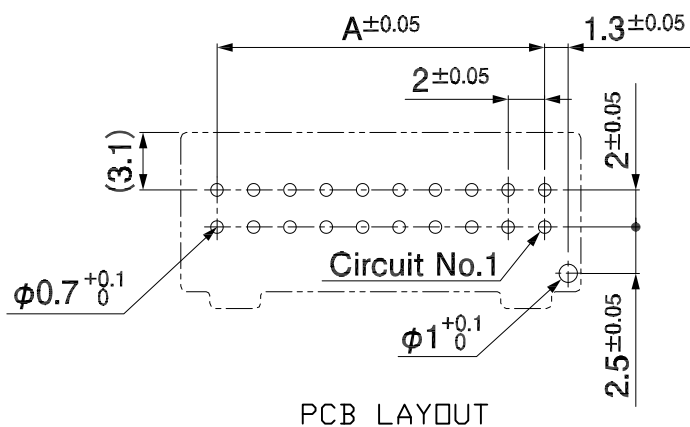

PIN	Dimensions	
	A	B
10P	8.00	12.00
12P	10.00	14.00
14P	12.00	16.00
16P	14.00	18.00
20P	18.00	22.00
22P	20.00	24.00
24P	22.00	26.00
40P	38.00	42.00

		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	<p>康导新能源                  网址: www.dgonns.com 电话: 0769-85337633                  邮箱: 2850176986@qq.com 传真: 0769-85392827</p>	PART. NO: 22010A	
		LINEAR ANGLES		APPROVED	黎腾	2017.06.16		DWG. NO:	
A0		新图面发行	2017.06.16	DESIGNER	肖坤权	2017.06.16		REV: A0 SHEET: 1/1	
REV.	REVISION RECORD		DATE	DRAWN	旷淇	2017.06.16		TITLE: 2.00mmPITCH 180° WAFER DIP TYPE	
1	2	3	4	5	6	7	8		