

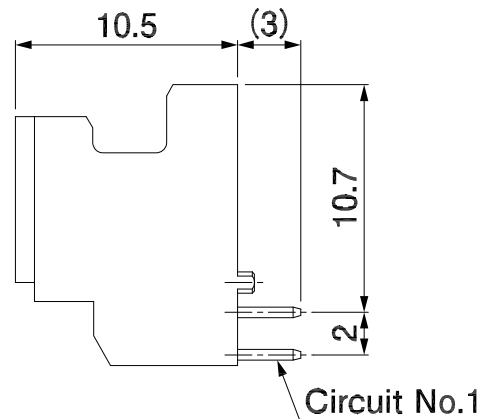


环保物料

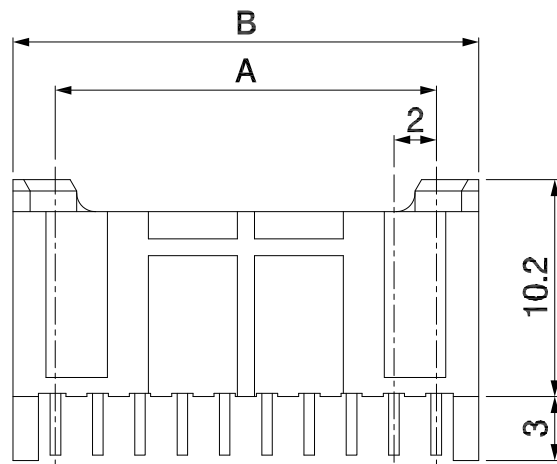

**主要技术参数 Main Specifications**

线 数 (Poles): 10 to 40  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 125V AC DC  
 额定电流 (Rated current): 3.0A AC DC  
 耐 电压 (Withstand Voltage): 500V AC/minute  
 温度范围 (Temperature Range):  $-40^{\circ}C \sim +105^{\circ}C$

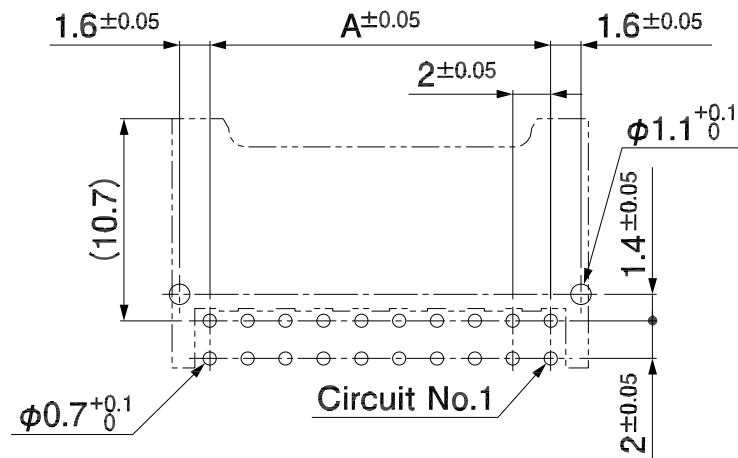

PCB LAYOUT

| PIN | Dimensions |       |
|-----|------------|-------|
|     | A          | B     |
| 10P | 8.00       | 12.00 |
| 12P | 10.00      | 14.00 |
| 14P | 12.00      | 16.00 |
| 16P | 14.00      | 18.00 |
| 20P | 18.00      | 22.00 |
| 22P | 20.00      | 24.00 |
| 24P | 22.00      | 26.00 |
| 40P | 38.00      | 42.00 |

| ITEM | COMPONENT | Q'TY  | MATERIAL        | FINISH    |
|------|-----------|-------|-----------------|-----------|
| B    | CONTACT   | n PCS | Brass           | Sn-plated |
| A    | HOUSING   | 1 PCS | PA GLASS FILLED | UL 94V-0  |

| REV. | REVISION RECORD | DATE       | UNIT: MM | GENERAL TOLERANCES |          | SCALE: 1:1 | NAME | DATE       |
|------|-----------------|------------|----------|--------------------|----------|------------|------|------------|
|      |                 |            |          | LINEAR             | ANGLES   |            |      |            |
| A0   | 新图面发行           | 2017.06.16 | MM       | 0.00±0.25          | X° ±3°   | APPROVED   | 黎腾   | 2017.06.16 |
|      | REVISION RECORD | DATE       | SIZE: A4 | 0.000±0.15         | X° X'±2° | DESIGNER   | 肖坤权  | 2017.06.16 |
|      |                 |            |          |                    |          | DRAWN      | 旷淇   | 2017.06.16 |



|           |         |            |
|-----------|---------|------------|
| PART. NO: | 22010AW |            |
| DWG. NO:  |         |            |
| REV:      | A0      | SHEET: 1/1 |