
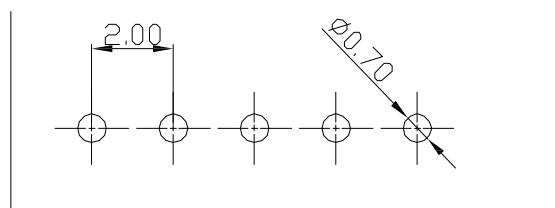
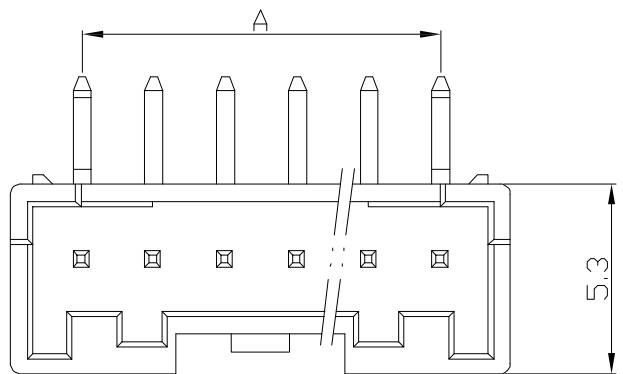
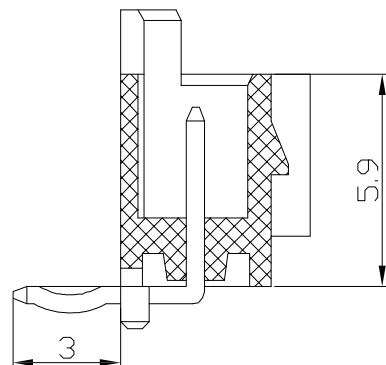


环保物料

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 100V AC, DC
- 3、Temperatuer Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 800V AC/minute

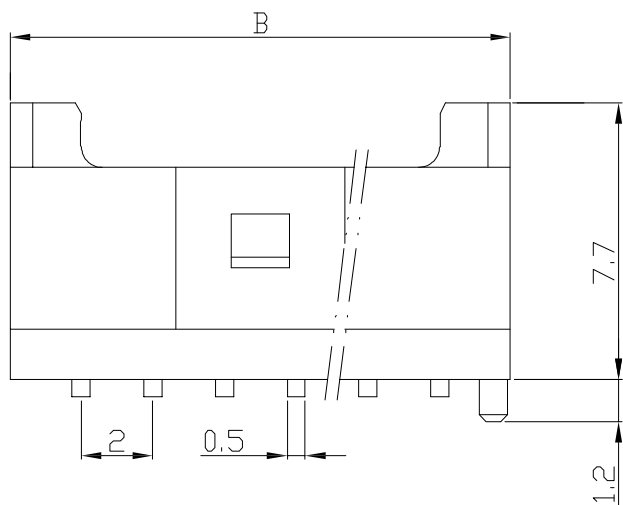

P. C. B LAYOUT

Poles	Dimensions mm	
	A	B
2	2.0	6.0
3	4.0	8.0
4	6.0	10.0
5	8.0	12.0
6	10.0	14.0
7	12.0	16.0
8	14.0	18.0
9	16.0	20.0
10	18.0	22.0
11	20.0	24.0
12	22.0	26.0
13	24.0	28.0
14	26.0	30.0
15	28.0	32.0

序号	图号	名称	材料	数量	附注
2		Wafer 针	Brass Tin 黄铜镀锡	N	
1		Housing 基座	PA66 (UL94V-0/V-2)	1	White (白色)

REV.	REVISION RECORD	DATE	SIZE: A4	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.25	X° ±3°	APPROVED	黎腾	2017.06.16
				0.0±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16
				0.000±0.15	X° X'±2°	DRAWN	旷淇	2017.06.16



PART. NO:	22008AW
DWG. NO:	
REV:	A0
SHEET:	1/1