
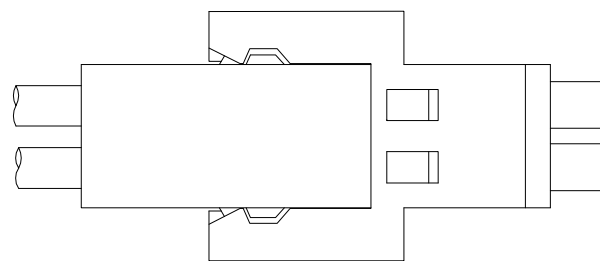
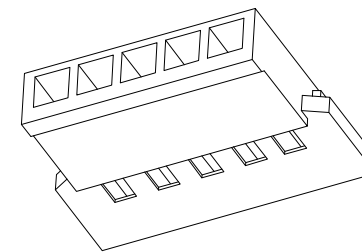
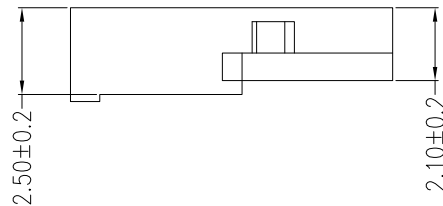



环保物料

主要技术参数 Main Specifications

线 数 (Poles): 02 to 16  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 125V AC DC  
 额定电流 (Rated current): 2.0A AC DC  
 耐 电压 (Withstand Voltage): 500V AC/minute  
 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

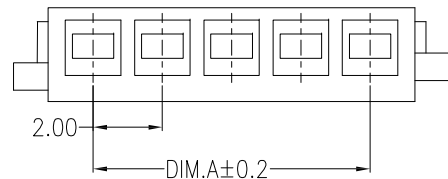

Assembly Layout

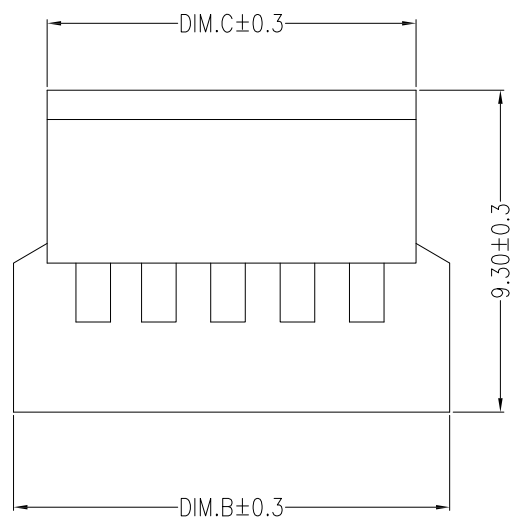

Circuits	Dimensions (mm)		
	A	B	C
02	2.00	6.60	4.65
03	4.00	8.60	6.65
04	6.00	10.60	8.65
05	8.00	12.60	10.65
06	10.00	14.60	12.65
07	12.00	16.60	14.65
08	14.00	18.60	16.65
09	16.00	20.60	18.65
10	18.00	22.60	20.65
11	20.00	24.60	22.65
12	22.00	26.60	24.65
13	24.00	28.60	26.65
14	26.00	30.60	28.65
15	28.00	32.60	30.65
16	30.00	34.60	32.65

A	HOUSING	1 PCS	PA66	COLOR:WHITE
ITFM	COMPONENT	Q'TY	MATERIAL	FINISH

GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	
LINEAR	ANGLES	APPROVED	黎腾	2017.06.16	
0.00±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16	
0.00±0.25	X° ±3°	DRAWN	旷淇	2017.06.16	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°

**康 导 新 能 源**  
 网址: www.dgonns.com 电话: 0769-85337633  
 邮箱: 2850175988@qq.com 传真: 0769-85392827

PART. NO:	22007P	
DWG. NO:		
REV:	A0	SHEET: 1/1