
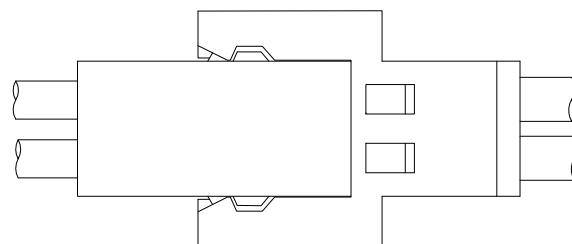
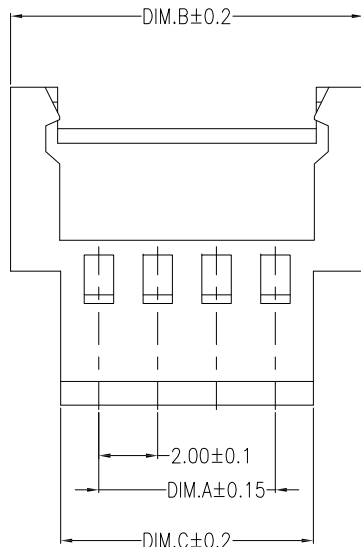
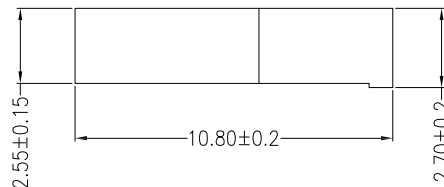



环保物料

主要技术参数 Main Specifications

线 数 (Poles): 02 to 16  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 125V AC DC  
 额定电流 (Rated current): 2.0A AC DC  
 耐 电压 (Withstand Voltage): 500V AC/minute  
 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$



Assembly Layout



Circuits	Dimensions (mm)		
	A	B	C
02	2.00	8.00	4.60
03	4.00	10.00	6.60
04	6.00	12.00	8.60
05	8.00	14.00	10.60
06	10.00	16.00	12.60
07	12.00	18.00	14.60
08	14.00	20.00	16.60
09	16.00	22.00	18.60
10	18.00	24.00	20.60
11	20.00	26.00	22.60
12	22.00	28.00	24.60
13	24.00	30.00	26.60
14	26.00	32.00	28.60
15	28.00	34.00	30.60
16	30.00	36.00	32.60

A	HOUSING	1 PCS	PA66	COLOR:WHITE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
A0	新图面发行	2017.06.16	MM	0.00±0.25	X° ±3°	APPROVED	黎腾	2017.06.16
				0.0±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16
				0.000±0.15	X° X'±2°	DRAWN	旷淇	2017.06.16

**康 导 新 能 源**  
 网址: www.dgonns.com 电话: 0769-85337633  
 邮箱: 2850175988@qq.com 传真: 0769-85392827

PART. NO:	22007R	
DWG. NO:		
REV:	A0	SHEET: 1/1