
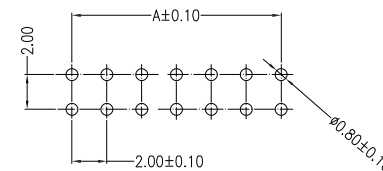
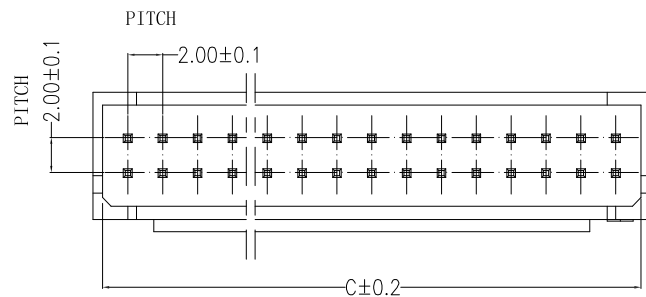
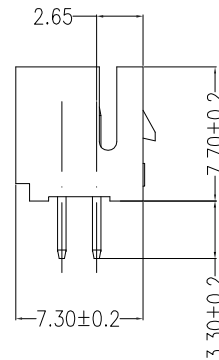
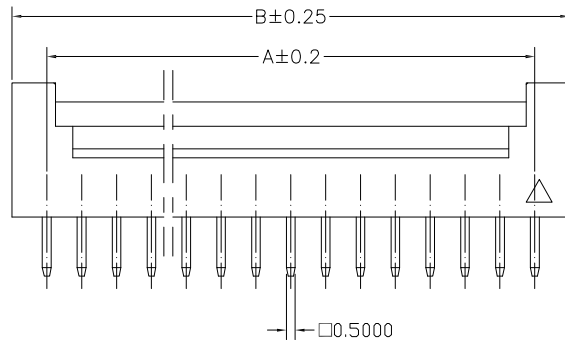
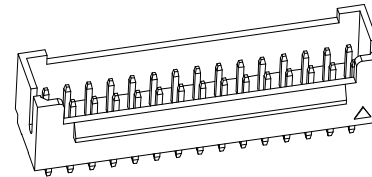


环保物料

主要技术参数 Main Specifications

线数 (Poles): 04 to 60
 接触电阻 (Contact resistance): $\leq 30m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 3.0A AC DC
 耐电压 (Withstand Voltage): 1000V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

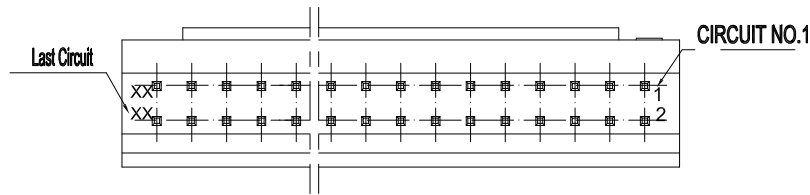

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

Circuits	Dimension mm		
	A	B	C
2X2	2.00	6.00	4.90
2X3	4.00	8.00	6.90
2X4	6.00	10.00	8.90
2X5	8.00	12.00	10.90
2X6	10.00	14.00	12.90
2X7	12.00	16.00	14.90
2X8	14.00	18.00	16.90
2X9	16.00	20.00	18.90
2X10	18.00	22.00	20.90
2X11	20.00	24.00	22.90
2X12	22.00	26.00	24.90
2X13	24.00	28.00	26.90
2X14	26.00	30.00	28.90
2X15	28.00	32.00	30.90
2X16	30.00	34.00	32.90
2X17	32.00	36.00	34.90
2X18	34.00	38.00	36.90
2X19	36.00	40.00	38.90
2X20	38.00	42.00	40.90
~	~	~	~
2X30	58.00	62.00	60.90

C	CONTACT	2~15 PCS	Brass	Sn-plated
B	CONTACT	2~15 PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	PA66	94-V0
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
LINEAR	ANGLES	APPROVED	黎腾	2017.06.16
0.00±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16
0.00±0.25	X° ±3°	DRAWN	旷淇	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15
A0	新图面发行	2017.06.16	UNIT: MM	X° X'±2°


康导新能源
 网址: www.dgconne.com 电话: 0769-85337633
 邮箱: 2850176988@qq.com 传真: 0769-85392827

PART. NO:		22004A	
DWG. NO:			
REV:	A0	SHEET:	1/1