

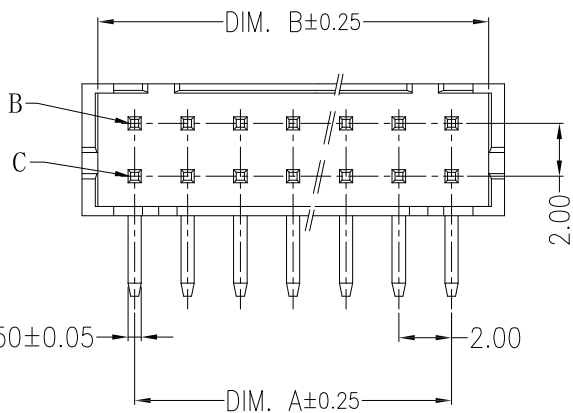
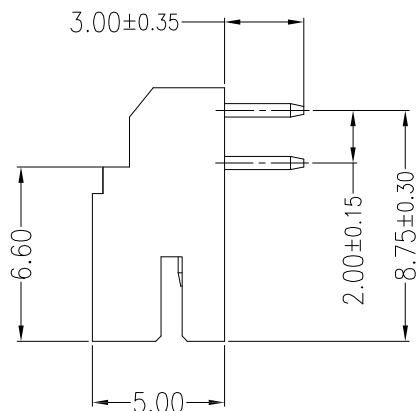


环保物料

主要技术参数 Main Specifications

线数 (Poles): 04 to 40
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 2.0A AC DC
 耐电压 (Withstand Voltage): 1000V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

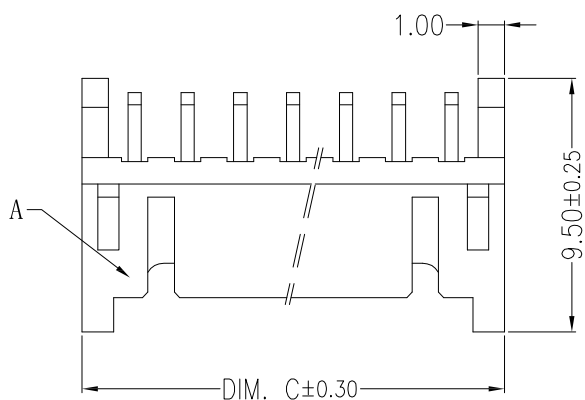

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

Circuits	Dimensions (mm)		
	DIM. A	DIM. B	DIM. C
2*2	2.00	5.00	6.00
2*3	4.00	7.00	8.00
2*4	6.00	9.00	10.00
2*5	8.00	11.00	12.00
2*6	10.00	13.00	14.00
2*7	12.00	15.00	16.00
2*8	14.00	17.00	18.00
2*9	16.00	19.00	20.00
2*10	18.00	21.00	22.00
2*11	20.00	23.00	24.00
2*12	22.00	25.00	26.00
2*13	24.00	27.00	28.00
2*14	26.00	29.00	30.00
2*15	28.00	31.00	32.00
2*16	30.00	33.00	34.00
2*17	32.00	35.00	36.00
2*18	34.00	37.00	38.00
2*19	36.00	39.00	40.00
2*20	38.00	41.00	42.00

B	CONTACT	2*2~2*20PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	PA66	94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.00±0.35	X° REF±6°	APPROVED	黎腾	2017.06.16
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.25	X° ±3°	DESIGNER	肖坤权	2017.06.16
	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	旷淇	2017.06.16

康导新能源
 网址: www.dgoonne.com 电话: 0769-85337633
 邮箱: 2850176988@qq.com 传真: 0769-85392827

PART. NO:	22003AWD	
DWG. NO:		
REV:	A0	SHEET: 1/1