


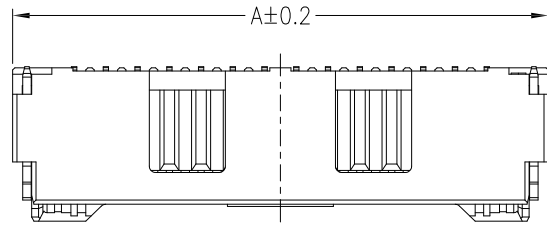
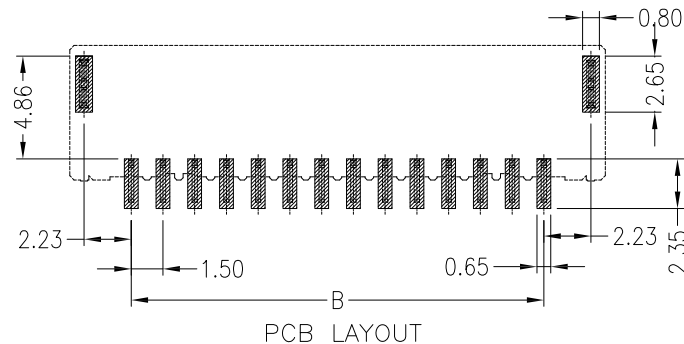


环保物料

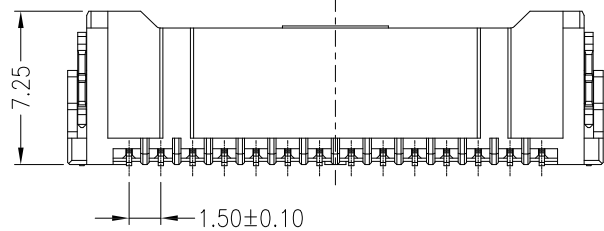

Specifications:

Contact resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 500M\Omega$
 Rated voltage: 100V AC DC
 Rated current: 2.0A AC DC (AWG#24)
 Withstand Voltage: 500V AC/minute
 Temperature Range: $-40^{\circ}C \sim +105^{\circ}C$
 Housing: LCP UL94V-0, Natural (Beige)
 Contacts: Phosphor Bronze/Sn-plated
 Solder Tabs: Brass/Sn-plated

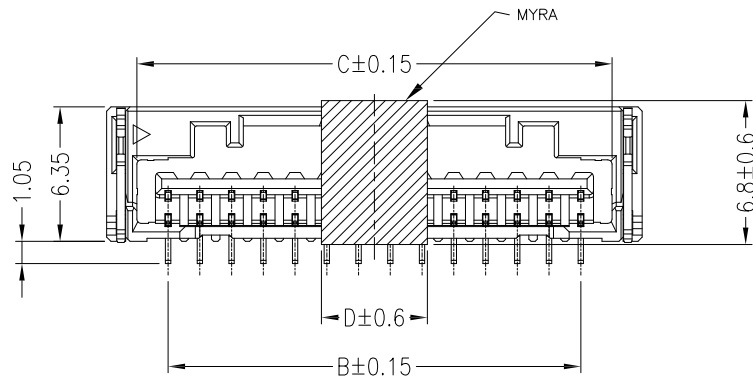

尺寸	A	B	C	D
* 2P	7.30	1.50	4.45	6.10
* 3P	8.80	3.00	5.95	7.60
* 4P	10.3	4.50	7.45	9.10
* 5P	11.8	6.00	8.95	10.6
6P	13.3	7.50	10.45	12.1
7P	14.80	9.00	11.95	13.60
8P	16.30	10.50	13.45	5.00
9P	17.80	12.00	14.95	5.00
10P	19.30	13.50	16.45	5.00
11P	20.80	15.00	17.95	5.00
12P	22.30	16.50	19.45	5.00
13P	23.80	18.00	20.95	5.00
14P	25.30	19.50	22.45	5.00
15P	26.80	21.00	23.95	5.00

		GENERAL TOLERANCES		SCALE:	NAME	DATE	 康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850176986@qq.com 传真: 0769-85392827	PART. NO:
		LINEAR	ANGLES	1:1	黎腾	2017.06.16		21506AWV
		0.00±0.35	X° REF±6°	APPROVED	肖坤权	2017.06.16		DWG. NO:
A0	新图面发行	2017.06.16	UNIT: MM	DESIGNER	旷淇	2017.06.16		REV: A0
REV.	REVISION RECORD	DATE	SIZE: A4	DRAWN	1.50mmPITCH 180° WAFER SMT TYPE		SHEET: 1/1	