
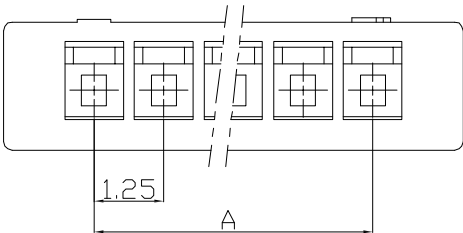
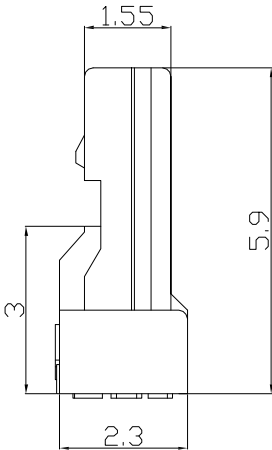



环保物料

主要技术参数 Main Specifications


线 数 (Poles): 02 to 30
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 500\text{M}\Omega$
额定电压 (Rated voltage): 150V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage): 500V AC/minute
温度范围 (Temperature Range) : $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

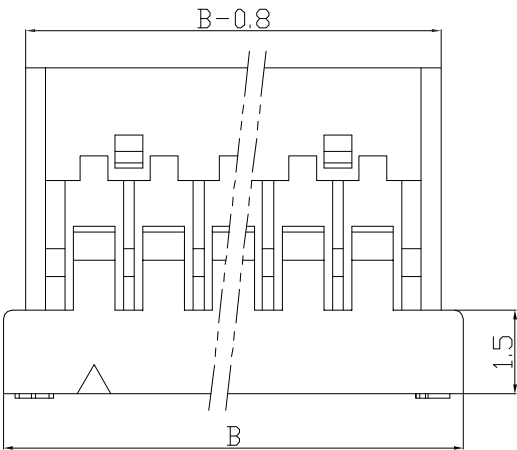


注意无泡点!



3P



2P

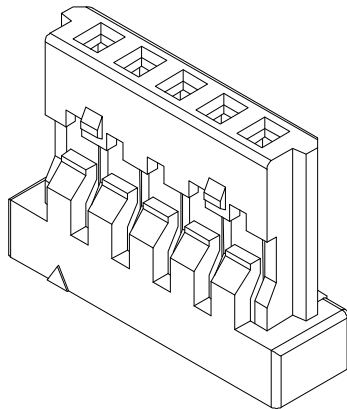

Poles	Dimensions mm	
	A	B
2	1.25	4.5
3	2.50	5.75
4	3.75	7.0
5	5.00	8.25
6	6.25	9.5
7	7.50	10.75
8	8.75	12.0
9	10.00	13.25
10	11.25	14.5
11	12.50	15.75
12	13.75	17.0
13	15.00	18.25
14	16.25	19.5
15	17.50	20.75
16	18.75	22.0
17	20.00	23.25
18	21.25	24.5
19	22.50	25.75
20	23.75	27.0
—	—	—
30	36.25	39.5

1		Housing 胶壳	PA66 (UL94V-0/V-2)	1	
序号	图 号	名 称	材 料	数 量	附 注

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgconne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART. NO: 21256Y		
				LINEAR	ANGLES					APPROVED 黎腾	2017. 06. 16	
				0. 0±0. 35	X° REF±6°							
AO	新图面发行	2017. 06. 16	UNIT: MM	0. 00±0. 25	X° ±3°	DESIGNER 肖坤权	2017. 06. 16	TITLE: 1. 25mmPITCH TERMINAL				DWG. NO:
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 15	X° X'±2°	DRAWN 旷淇	2017. 06. 16		REV: A0			SHEET: 1/1