




环保物料



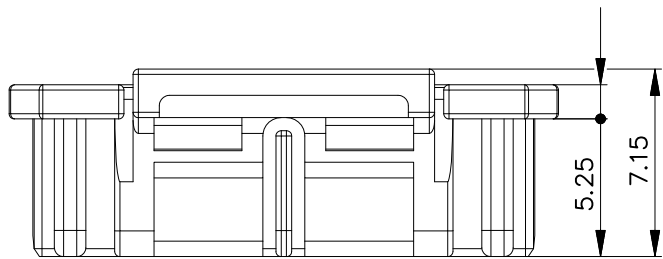


主要技术参数 Main Specifications


接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 500M\Omega$
 额定电压 (Rated voltage): 150V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐电压 (Withstand Voltage): 500V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

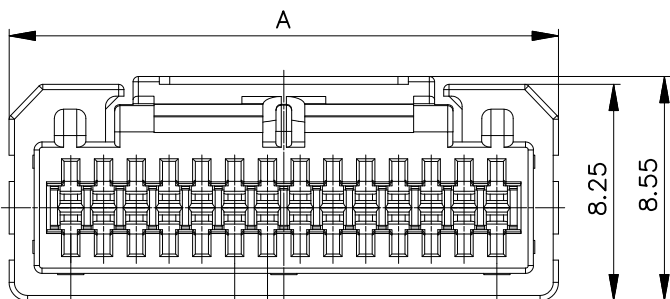


CIRCUIT 1 MARK(FOR 8-14 CIRCUIT)



CIRCUIT N-1 CIRCUIT 1 MARK(FOR 16-42 CIRCUIT)

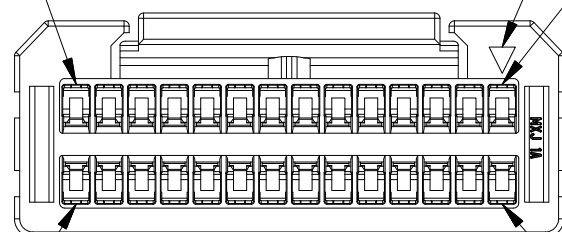

25.00	29.70	42
23.75	28.45	40
22.50	27.20	38
21.25	25.95	36
20.00	24.70	34
18.75	23.45	32
17.50	22.20	30
16.25	20.95	28
15.00	19.70	26
13.75	18.45	24
12.50	17.20	22
11.25	15.95	20
10.00	14.70	18
8.75	13.45	16
7.50	12.20	14
6.25	10.95	12
5.00	9.70	10
3.75	8.45	8
B	A	CIRCUIT

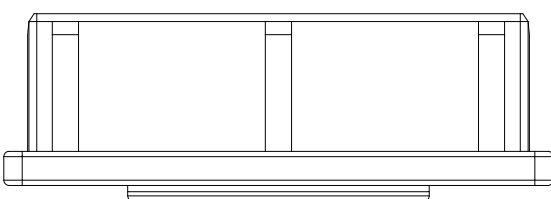

A	HOUSING		PBT UL94 V-0	COLOR:WHITE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

GENERAL TOLERANCES		SCALE:	NAME	DATE
LINEAR	ANGLES	1:1	黎腾	2017.06.16
0.0±0.35	X° REF±6°	APPROVED	肖坤权	2017.06.16
0.00±0.25	X° ±3°	DESIGNER	旷淇	2017.06.16
0.000±0.15	X° X'±2°	DRAWN		

康导新能源
 网址: www.dgonne.com 电话: 0769-85337633
 邮箱: 2850176986@qq.com 传真: 0769-85392827

PART. NO:	21257Y
DWG. NO:	
REV:	A0
SHEET:	1/1