

环保物料

Specifications:

Contact resistance: $\leq 20\text{m}\Omega$





Insulation resistance: $\geq 100\text{M}\Omega$

Rated voltage: 125V AC DC


Rated current: 1.0A AC DC

Withstand Voltage: 500V AC/minute


Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

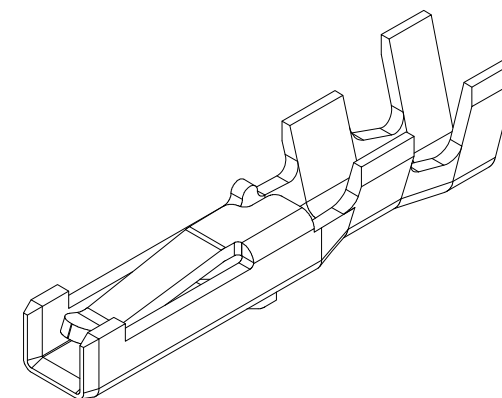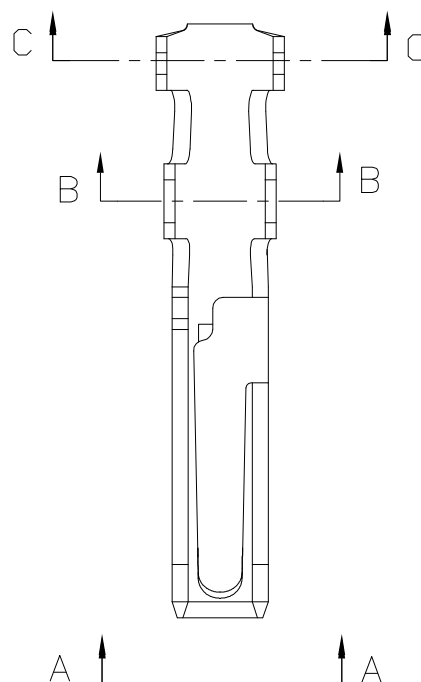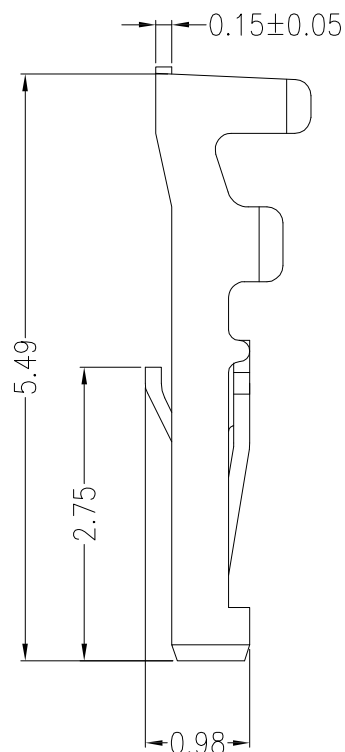

A-A



B-B



C-C

Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
AWG #28~#32	0.90mm (max)	Phosphor bronze	Tin-plated	10.000 pcs

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART. NO: 21254T		
				LINEAR	ANGLES	APPROVED	黎腾	2017. 06. 16		DWG. NO:		
				0.0±0.35	X° REF±6°	DESIGNER	肖坤权	2017. 06. 16				
A0	新图面发行	2017. 06. 16	UNIT: MM	0.00±0.25	X° ±3°	DRAWN	旷淇	2017. 06. 16		TITLE: 1.25mmPITCH TERMINAL	REV: A0	SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°							