




环保物料

主要技术参数 Main Specifications


线 数 (Poles): 02 to 16
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 100M\Omega$
 额定电压 (Rated voltage): 125 V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐 电 压 (Withstand Voltage): 500V AC/minute
 温度范围 (Temperature Range) : $-25^{\circ}C \sim +85^{\circ}C$

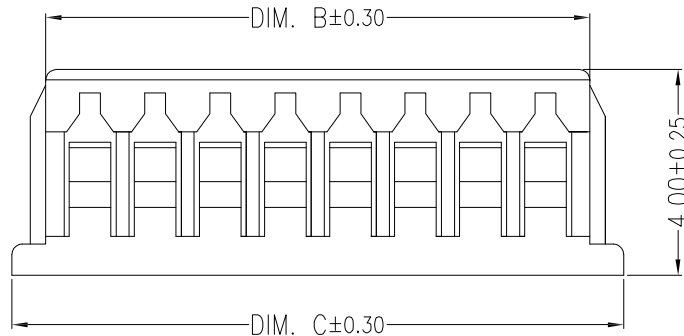

Circuits	Dimensions (mm)		
	DIM. A	DIM. B	DIM. C
02	1.25	3.00	4.25
03	2.50	4.25	5.50
04	3.75	5.50	6.75
05	5.00	6.75	8.00
06	6.25	8.00	9.25
07	7.50	9.25	10.50
08	8.75	10.50	11.75
09	10.00	11.75	13.00
10	11.25	13.00	14.25
11	12.50	14.25	15.50
12	13.75	15.55	16.75
13	15.00	16.75	18.00
14	16.25	1800	19.25
15	17.50	19.25	20.50
16	18.75	20.50	21.75

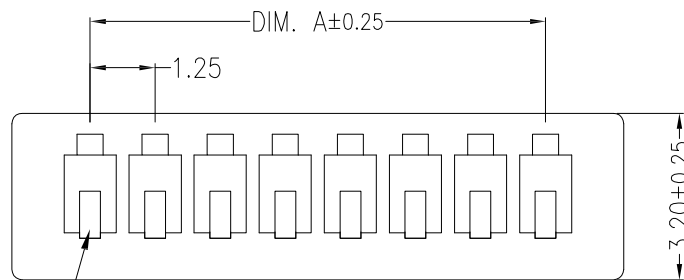

Circuit 1

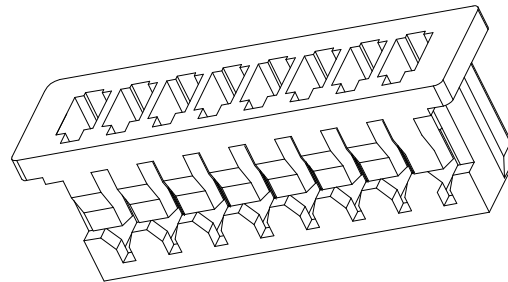

A	HOUSING	1~16 PCS	PA66	COLOR:WHITE
ITFM	COMPONENT	Q'TY	MATERIAL	FINISH

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
A0	新图面发行	2017.06.16	MM	0.00 ± 0.25	X° ± 3°	APPROVED	黎腾	2017.06.16
	REVISION RECORD	DATE	SIZE: A4	0.000 ± 0.15	X° X' ± 2°	DESIGNER	肖坤权	2017.06.16
						DRAWN	旷淇	2017.06.16


康 导 新 能 源
 网址: www.dgonne.com 电话: 0769-86337633
 邮箱: 2850176988@qq.com 传真: 0769-86392827

PART. NO:	21251Y	
DWG. NO:		
REV:	A0	SHEET: 1/1