





环保物料

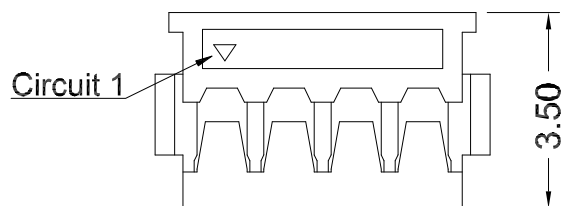



2~5Pin Shape

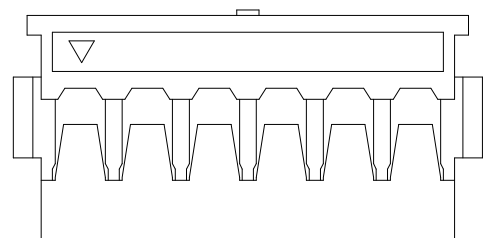


6Pin Shape

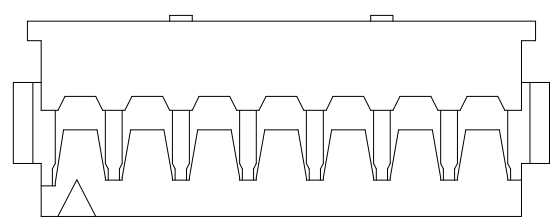

7Pin Shape

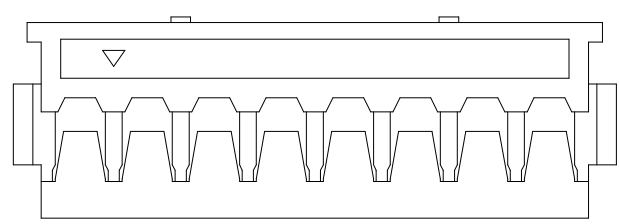

8~10Pin Shape

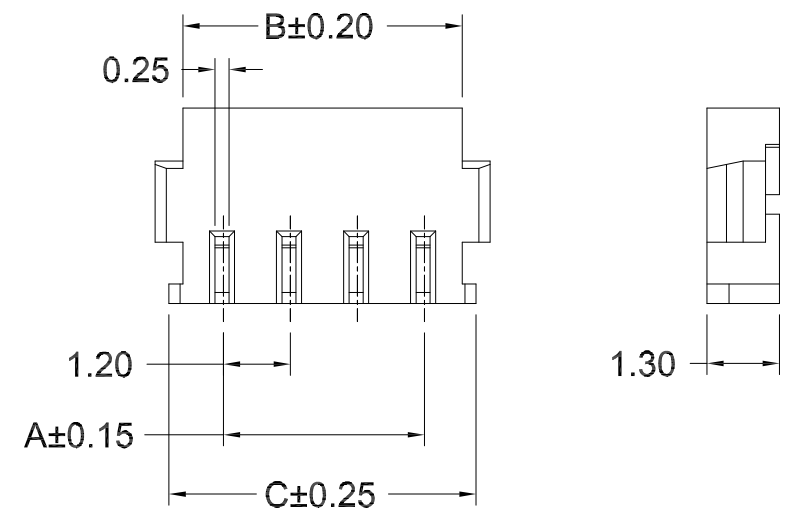

Specifications:

- Contact resistance:  $\leq 20m\Omega$
- Insulation resistance:  $\geq 100M\Omega$
- Rated voltage: 50V AC DC
- Rated current: 2.0A AC DC
- Withstand Voltage: 500V AC/minute
- Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$
- Housing: LCP UL94V-0, Black

Poles	Dimensions(mm)		
	A	B	C
2	1.20	2.60	3.10
3	2.40	3.80	4.30
4	3.60	5.00	5.50
5	4.80	6.20	6.70
6	6.00	7.40	7.90
7	7.20	8.60	9.10
8	8.40	9.80	10.30
9	9.60	11.00	11.50
10	10.80	12.20	12.70

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	<b>康导新能源</b> 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850176988@qq.com 传真: 0769-85392827	PART. NO: 21201Y	
				LINEAR	ANGLES	APPROVED	黎腾	2017.06.16		DWG. NO:	
A0		新图面发行		0.00±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16		REV: A0	
REV.		REVISION RECORD		0.00±0.25	X° ±3°	DRAWN	旷淇	2017.06.16		SHEET: 1/1	
				0.00±0.15	X° X'±2°	TITLE: 1.2mmPITCH HOUSING					