
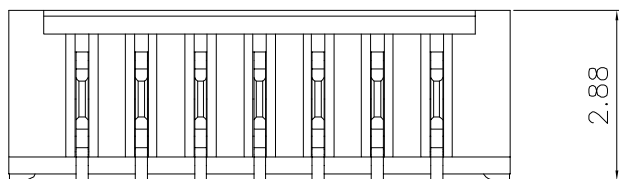
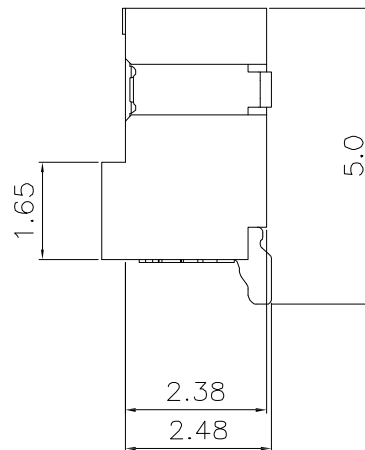


环保物料

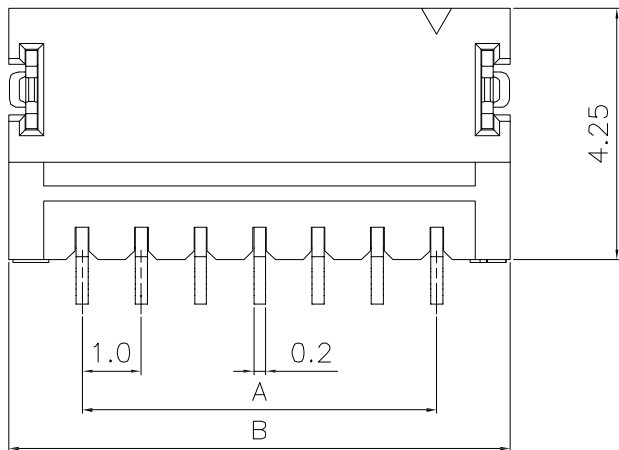

主要技术参数  
Main Specifications

线数 (poles): 2 to 20P  
 额定电流 (Current rating): 1.0A AC, DC  
 额定电压 (Voltage rating): 50V AC, DC  
 温度范围 (Temperature range): -25°C to +85°C  
 接触电阻 (Contact resistance): ≤20mΩ  
 绝缘电阻 (Insulation resistance): ≥100mΩ  
 耐电压 (Withstand voltage): 500V AC/minute  
 适用线规 (Applicable wire): AWG #32 to #28

Poles	Dimensions mm	
	A	B
2	1.0	3.5
3	2.0	4.5
4	3.0	5.5
5	4.0	6.5
6	5.0	7.5
7	6.0	8.5
8	7.0	9.5
9	8.0	10.5
10	9.0	11.5
11	10.0	12.5
12	11.0	13.5
13	12.0	14.5
14	13.0	15.5
15	14.0	16.5
16	15.0	17.5
17	16.0	18.5
18	17.0	19.5
19	18.0	20.5
20	19.0	21.5

3	焊片	Phos Bronze tin 磷青铜镀锡	2		
2	针脚	Phos Bronze tin 磷青铜镀锡	N		
1	基座	LCP UL94V-0	1		本色
序号	名称/料号	材料	每只用量 Each Amount	数量	附注

		GENERAL TOLERANCES		SCALE:	NAME	DATE
		LINEAR	ANGLES	1:1		
		0.0±0.35	X° REF±6°	APPROVED	黎腾	2017.06.16
AO	新图面发行	0.00±0.25	X° ±3°	DESIGNER	肖坤权	2017.06.16
REV.	REVISION RECORD	0.000±0.15	X° X'±2°	DRAWN	旷淇	2017.06.16

**康导新能源**  
 网址: www.dgconne.com 电话: 0769-85337633  
 邮箱: 2850175988@qq.com 传真: 0769-8539282

PART. NO:	21003AWB	
DWG. NO:		
REV:	AO	SHEET: 1/1

TITLE:  
1.0mmPITCH 90° WAFER SMT TYPE