

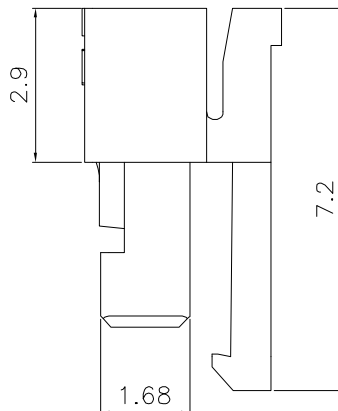


环保物料

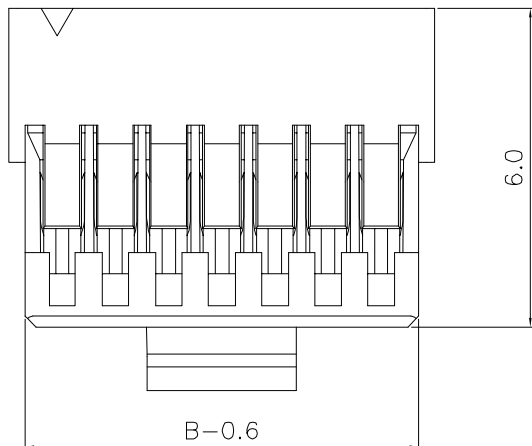

主要技术参数
Main Specifications

线数 (poles): 2 to 20P
 额定电流 (Current rating): 1.0A AC, DC
 额定电压 (Voltage rating): 50V AC, DC
 温度范围 (Temperature range): -25°C to +85°C
 接触电阻 (Contact resistance): ≤20mΩ
 绝缘电阻 (Insulation resistance): ≥100mΩ
 耐电压 (Withstand voltage): 500V AC/minute
 适用线规 (Applicable wire): AWG #32 to #28

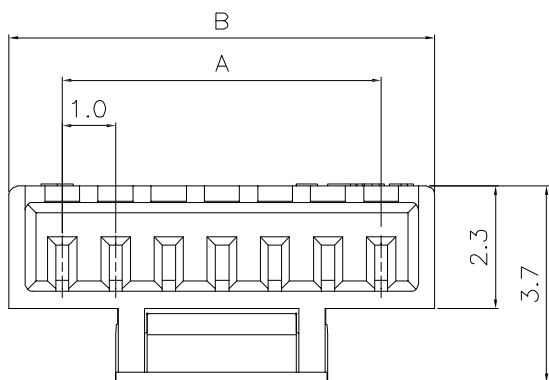

Poles	Dimensions mm	
	A	B
2	1.0	3.0
3	2.0	4.0
4	3.0	5.0
5	4.0	6.0
6	5.0	7.0
7	6.0	8.0
8	7.0	9.0
9	8.0	10.0
10	9.0	11.0
11	10.0	12.0
12	11.0	13.0
13	12.0	14.0
14	13.0	15.0
15	14.0	16.0
16	15.0	17.0
17	16.0	18.0
18	17.0	19.0
19	18.0	20.0
20	19.0	21.0

1	胶壳 (HOUSING)	PBT UL94V-0	1	White (白色)
序号	名称/料号	材料	数量	附注

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16
AO	新图面发行	2017.06.16	UNIT: MM	0.00±0.25	X° ±3°	DRAWN	旷淇	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°			

康导新能源 网址: www.dgconne.com 电话: 0769-85337633 邮箱: 2850175986@qq.com 传真: 0769-85392827		PART. NO: 21003Y2
TITLE: 1.0mmPITCH HOUSING		DWG. NO:
REV:	AO	SHEET: 1/1