

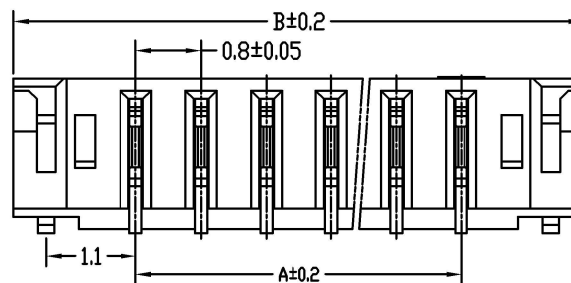
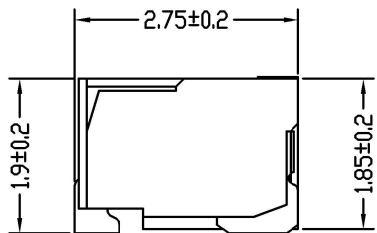


环保物料


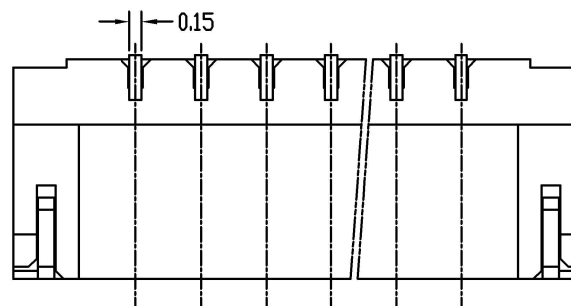


主要技术参数 Main Specifications

线 数 (Poles): 02 to 25
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 100M\Omega$
 额定电压 (Rated voltage): 30V AC DC
 额定电流 (Rated current): 0.5A AC DC
 耐电压 (Withstand Voltage): 200V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

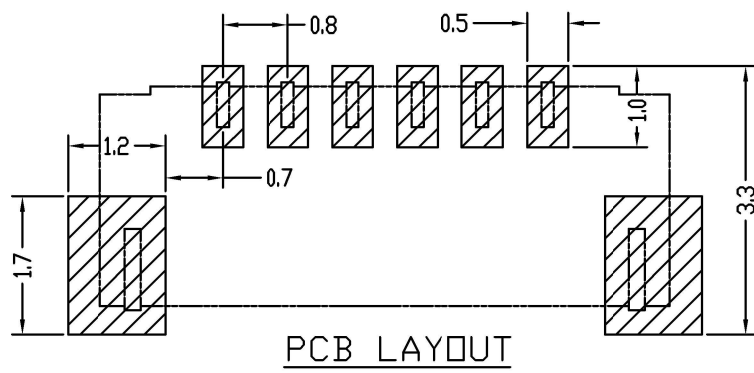

15	11.2	14.2			
14	10.4	13.4			
13	9.6	12.6			
12	8.8	11.8			
11	8.0	11.0	25	19.2	22.2
10	7.2	10.2	24	18.4	21.4
9	6.4	9.4	23	17.6	20.6
8	5.6	8.6	22	16.8	19.8
7	4.8	7.8	21	16.0	19.0
6	4.0	7.0	20	15.2	18.2
5	3.2	6.2	19	14.4	17.4
4	2.4	5.4	18	13.6	16.6
3	1.6	4.6	17	12.8	15.8
2	0.8	3.8	16	12.0	15.0
孔位	DIM A	DIM B	孔位	DIM A	DIM B

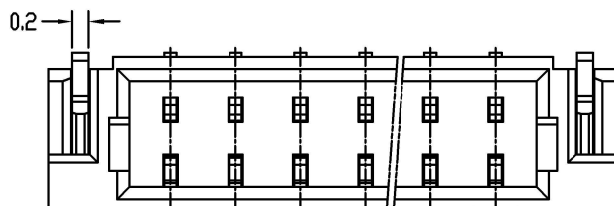

C	Soldet TAB	2 PCS	PhosphorBronze	Matte Sn-plated
B	CONTACT	n PCS	PhosphorBronze	Matte Sn-plated/GOLD
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	康导新能源 网址: www.dgonne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392627	PART. NO: 20801AWR		
		LINEAR	ANGLES	APPROVED	黎腾	2017.06.16		DWG. NO:		
		0.0±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16		REV: A0 SHEET: 1/1		
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.25	X° ±3°	DRAWN	明淇	2017.06.16	0.8mmPITCH 90° WAFER SMT TYPE	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°					