




# 环保物料

Specifications:  
 Voltage Rating : 600V AC/DC  
 Current Rating : 10A AC,DC  
 Withstand Voltage : 2200V AC/minute  
 Contact Resistance : 10mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -40°C~+105°C

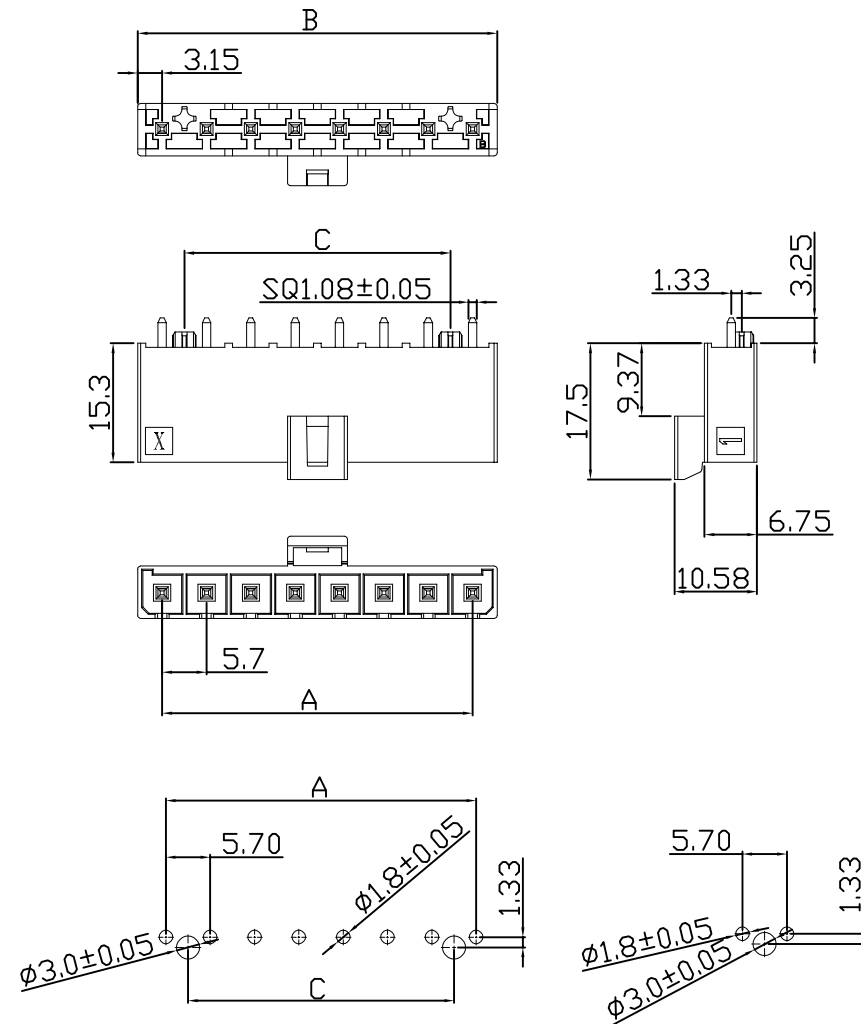


PCB board layout

2P PCB board layout

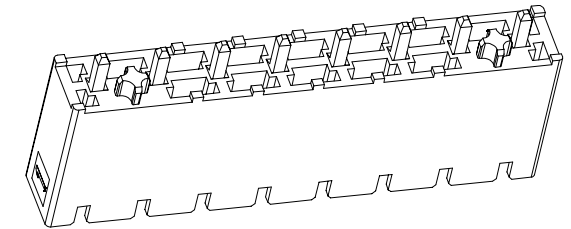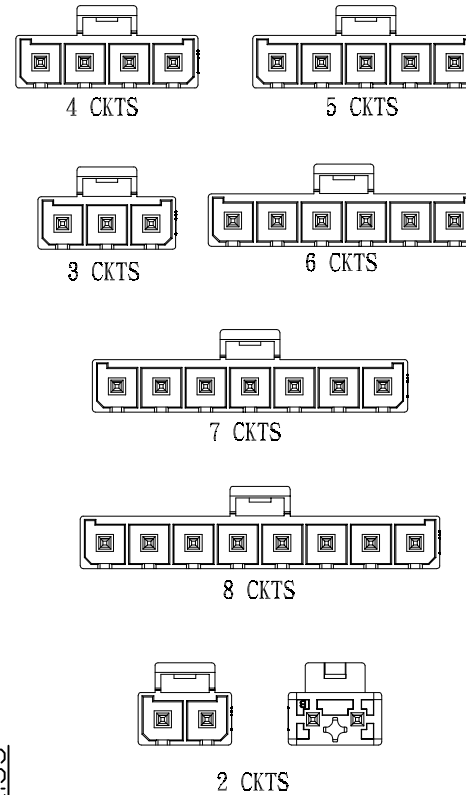

Circuits	DIM A	DIM B	DIM C
2	5.70	12.00	
3	11.40	17.70	5.70
4	17.10	23.40	11.40
5	22.80	29.10	17.10
6	28.50	34.80	22.80
7	34.20	40.50	28.50
8	39.90	46.20	34.20

Material	Color	PIN Material
LCP,UL94V-0	BLACK	High conductivity copper/Tin&Ni-plated

GENERAL TOLERANCES		SCALE:	NAME	DATE	 <b>康导新能源</b> 网址: www.dgoonne.com 电话: 0769-853377633 邮箱: 2850175986@qq.com 传真: 0769-853922827	PART. NO: 45702W00-NP*-A1-**  DWG. NO: ENDE05  REV: A0 SHEET: 1/1	
LINEAR	ANGLES	1:1	黎腾	2017.06.16			
0.0±0.40	X° REF±6°	APPROVED	肖坤权	2017.06.16			
0.00±0.25	X° ±3°	DESIGNER	旷淇	2017.06.16			
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	TITLE:	
A0	新图面发行	2017.06.16	UNIT: MM			5.70mm pitch single <i>Wafer</i>	