




环保物料

Specifications:  
 Voltage Rating : 250V AC/DC  
 Current Rating : 3A AC,DC  
 Withstand Voltage : 800V AC/minute  
 Contact Resistance : 10mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -25°C~+85°C



<2 to 9circuits>



<10 to 15circuits>

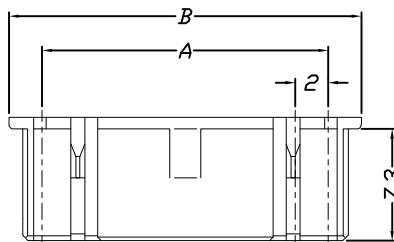

<16circuits>

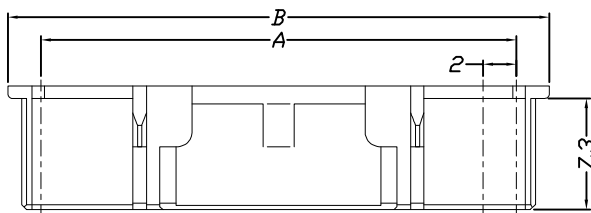

Unit: mm

Part No.	Dimensions	
	A	B
2P	2.00	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00

Material	Color
PA66,UL94V-0	Gray

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES	APPROVED	黎腾	2017. 06. 16
				0.0±0.25	X° REF±6°	DESIGNER	肖坤权	2017. 06. 16
AO	新图面发行	2017. 06. 16	UNIT: MM	0.00±0.15	X° ±3°	DRAWN	旷淇	2017. 06. 16
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°			



PART. NO: <b>42004H00-NP*-66</b>	
DWG. NO: ENDE05	
REV: AO	SHEET: 1/1

TITLE:  
**2.00mm pitch Single Housing**