

环保物料

Specifications:

Voltage Rating : 250V AC/DC


Current Rating : 3A AC,DC

Withstand Voltage : 800V AC/minute

Contact Resistance : 10mΩ(MAX.)


Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -25°C~+85°C

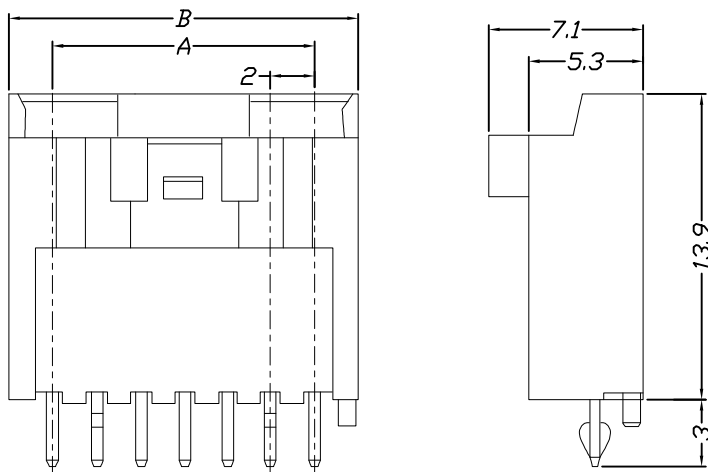

Unit: mm

Part No.	Dimensions	
	A	B
2P	2.00	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00

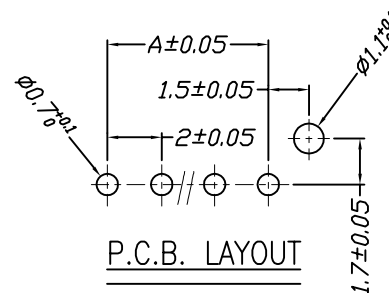

Material	Color	PIN Material
PBT,UL94V-0	Gray	Brass/Gold&Ni-plated

GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源 网址: www.dgoonne.com 电话: 0769-85337 邮箱: 2850175886@qq.com 传真: 0769-85392	PART NO:
LINEAR	ANGLES	1:1	黎腾	2017.06.16		42004W01-NP*-A1-**
0.0±0.25	X° REF±6°	APPROVED	肖坤权	2017.06.16	TITLE: 2.00mm pitch Single Wafer	DWG. NO:
0.00±0.15	X° ±3°	DESIGNER	肖坤权	2017.06.16		ENDE05
0.000±0.08	X° X'±2°	DRAWN	旷淇	2017.06.16		REV: A0 SHEET: 1/1