

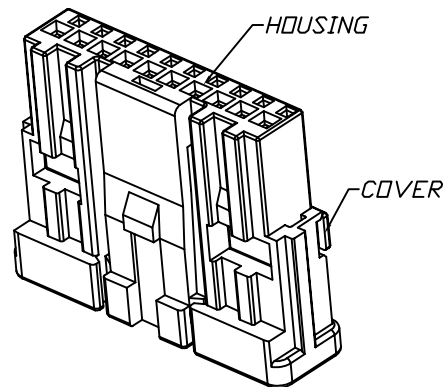
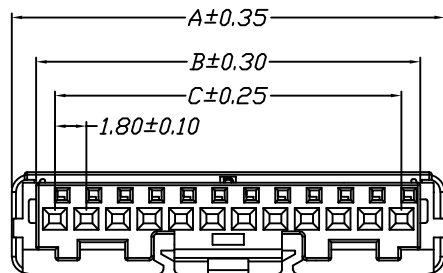


# 环保物料

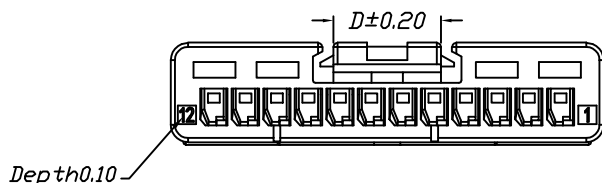

Specifications:  
 Voltage Rating : 250V AC/DC  
 Current Rating : 1A AC,DC  
 Withstand Voltage : 1000V AC/minute  
 Contact Resistance : 20mΩ(MAX.)  
 Insulation Resistance : 1000MΩ(MIN.)  
 Temperature Range : -40°C~+120°C

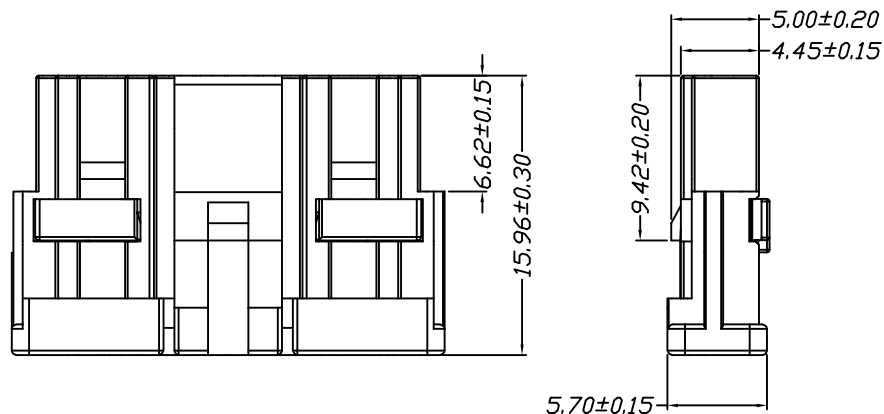

Poles	Dimensions			
	A	B	C	D
4	10.34	7.54	5.54	2.56
5	12.14	9.34	7.20	2.56
6	13.94	11.14	9.00	2.56
7	15.74	12.94	10.80	2.56
8	17.54	14.74	12.60	2.56
9	19.34	16.54	14.40	2.56
10	21.14	18.34	16.20	6.16
11	22.94	20.14	18.00	6.16
12	24.74	21.94	19.80	6.16
13	26.54	23.74	21.60	6.16
14	28.34	25.54	23.40	6.16
15	30.14	27.34	25.20	6.16
16	31.94	29.14	27.00	6.16
17	33.74	30.94	28.80	6.16
18	35.54	32.74	30.60	6.16
19	37.34	34.54	32.40	6.16
20	39.14	36.34	34.20	6.16

Material	Color
PA,UL94V-0	BLACK

		GENERAL TOLERANCES		SCALE:	NAME	DATE
		LINEAR	ANGLES	1:1		
		$0.0 \pm 0.25$	$X^\circ \text{ REF} \pm 6^\circ$	APPROVED	黎腾	2017.06.16
A0	新图面发行	2017.06.16	UNIT: MM	DESIGNER	肖坤权	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	DRAWN	旷淇	2017.06.16
			$0.000 \pm 0.08$			
			$X^\circ \text{ X}' \pm 2^\circ$			

**康导新能源**  
 网址: [www.dgconne.com](http://www.dgconne.com) 电话: 0769-85337633  
 邮箱: 2850175986@qq.com 传真: 0769-85392827

TITLE:  
**1.80mm PITCH Housing**

PART. NO:	41801H00-NPA-G2-PA
DWG. NO:	
REV:	A0
SHEET:	1/1