

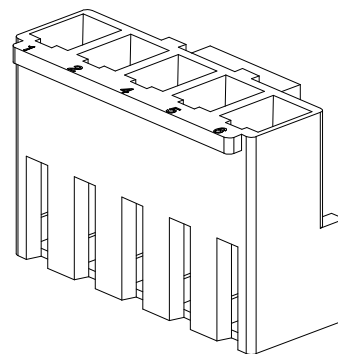
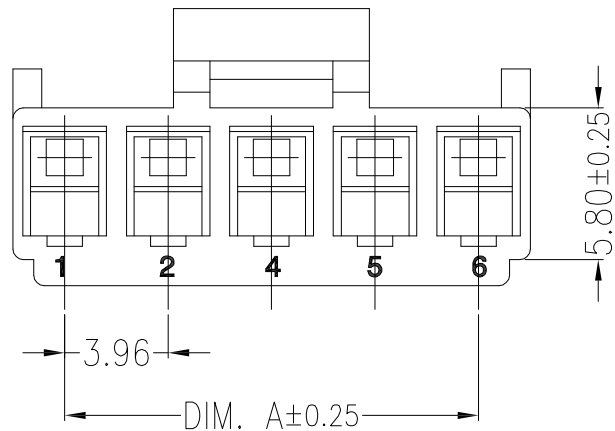


环保物料

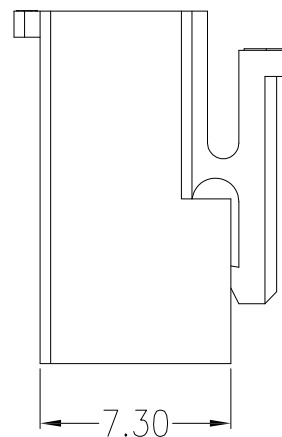

主要技术参数 Main Specifications

- 线数 (Poles): 02 to 14
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 7.0A AC DC
- 耐电压 (Withstand Voltage): 1500V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

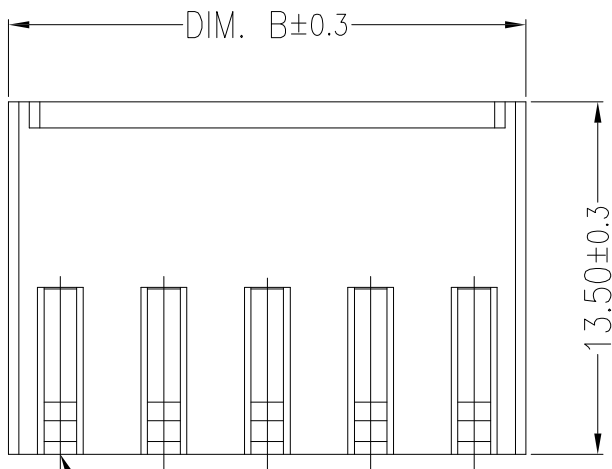

Circuits	Dimensions (mm)	
	DIM. A	DIM. B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44

Circuit 1

A	PEDESTAL	1 PCS	PA66	COLOR:WHITE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
LINEAR	ANGLES			
0.0±0.35	X° REF±6°	APPROVED	黎腾	2017.06.16
A0	新图面发行	DESIGNER	肖坤权	2017.06.16
REV.	REVISION RECORD	DATE	UNIT: MM	0.00±0.25
		DATE	SIZE: A4	X° X'±2°
				DRAWN
				旷淇
				2017.06.16



PART. NO:	23962Y	
DWG. NO:		
REV:	A0	SHEET: 1/1