
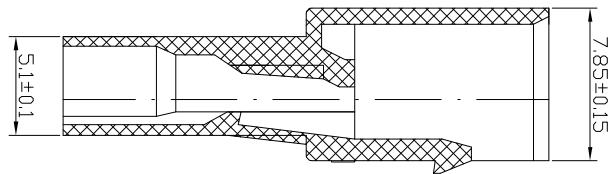



环保物料

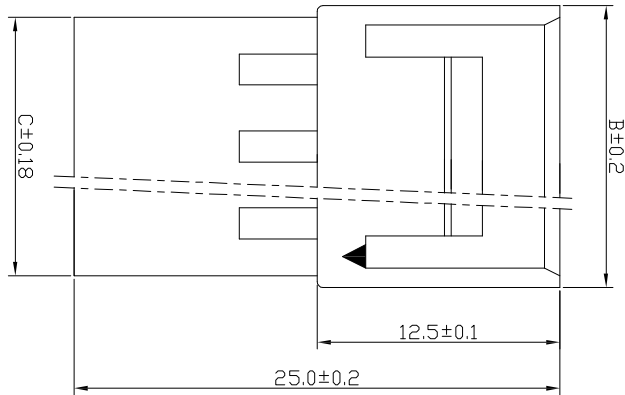

主要技术参数 Main Specifications

线 数 (Poles): 02 to 15
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 7.0A AC DC
 耐 电 压 (Withstand Voltage): 1500V AC/minute
 温度范围 (Temperature Range) : $-25^{\circ}C \sim +85^{\circ}C$

Circuits	Dimensions (mm)		
	DIM. A	DIM. B	DIM. C
02	3.96	10.54	9.34
03	7.92	14.50	13.30
04	11.88	18.46	17.26
05	15.84	22.42	21.22
06	19.80	26.38	25.18
07	23.76	30.34	29.14
08	27.72	34.30	33.10
09	31.68	38.26	37.06
10	35.64	42.22	41.02
11	39.60	46.18	44.98
12	43.56	50.14	48.94
13	47.52	54.10	52.90
15	55.44	62.02	60.82

A	PEDESTAL	1 PCS	PA66	UL 94V-0(2), COLOR:WHITE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
LINER	ANGLES	APPROVED	黎腾	2017.06.16
0.0±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16
A0	UNIT: MM	DRAWN	旷淇	2017.06.16
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15
			X° ±3°	X° X'±2°

康 导 新 能 源
 网址: www.dgonns.com 电话: 0769-85337633
 邮箱: 2850176988@qq.com 传真: 0769-85392827

PART. NO:	23962R
DWG. NO:	
REV:	A0
SHEET:	1/1