
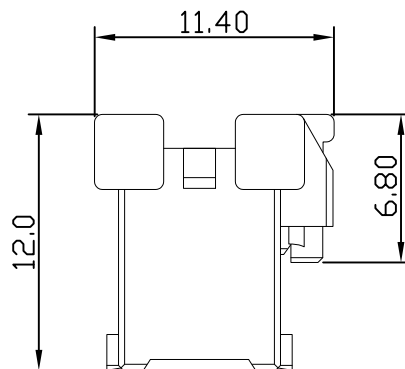


环保物料

主要技术参数 Main Specifications

线 数 (Poles): 08~40  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 250V AC DC  
 额定电流 (Rated current): 3.0A AC DC  
 耐 电 压 (Withstand Voltage): 1000V AC/minute  
 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

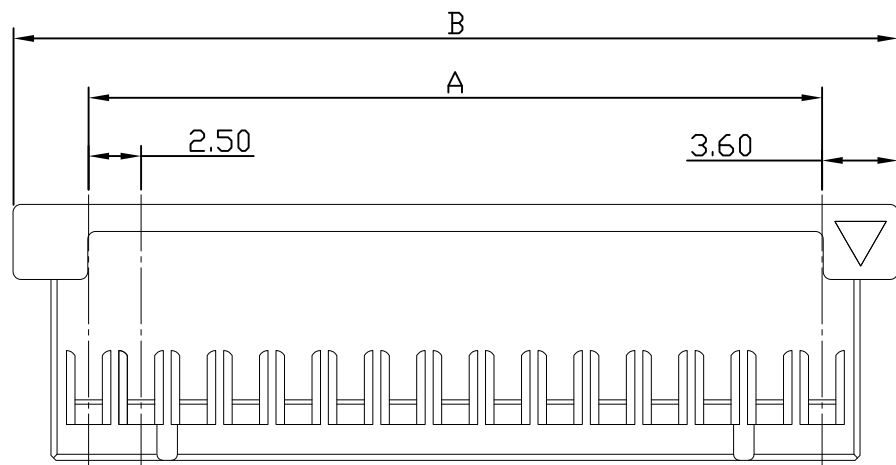

PIN	Dimensions	
	A	B
2*4P	7.50	14.70
2*5P	10.00	17.20
2*6P	12.50	19.70
2*7P	15.00	22.20
2*8P	17.50	24.70
2*9P	20.00	27.20
2*10P	22.50	29.70
2*11P	25.00	32.20
2*12P	27.50	34.70
2*13P	30.00	37.20
2*14P	32.50	39.70
2*15P	35.00	42.20
2*16P	37.50	44.70
2*17P	40.00	47.20
2*18P	42.50	49.70
2*20P	47.50	54.70

A	HOUSING	1 PCS	PA66	COLOR:WHITE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgonns.com 电话: 0769-85337633 邮箱: 2850176988@qq.com 传真: 0769-85392827	PART. NO: 22507Y	
				LINEAR	ANGLES					APPROVED	黎腾
			0.0±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16	REV: A0 SHEET: 1/1			
A0	新图面发行	2017.06.16	UNIT: MM	0.00±0.25	X° ±3°	DRAWN	旷淇			2017.06.16	TITLE: 2.50mmPITCH HOUSING
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°						