


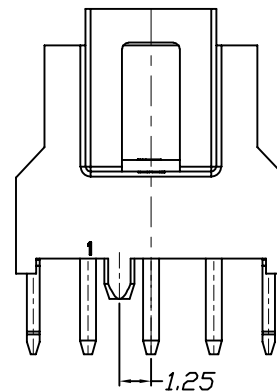
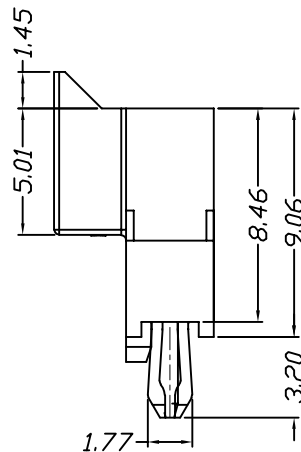
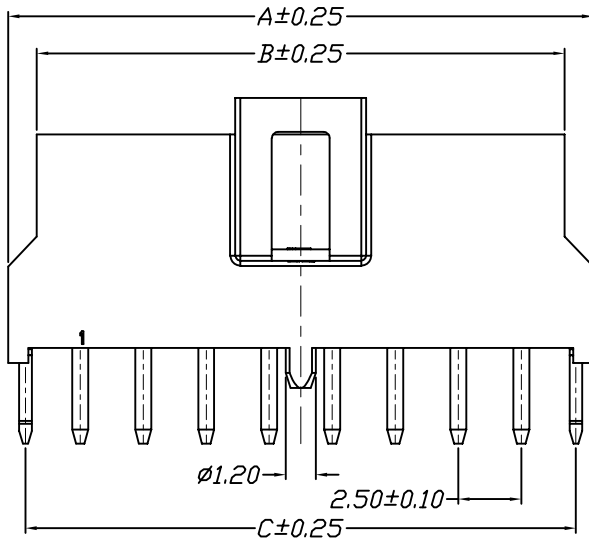


环保物料

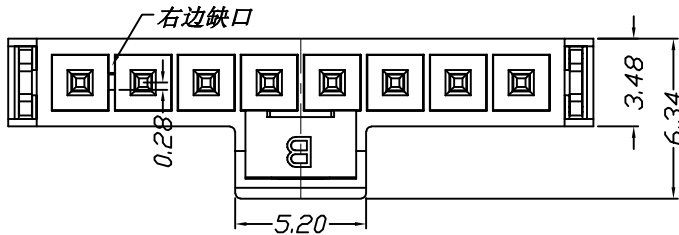

3P、5P、7P参考此图

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 6.5A AC,DC
Withstand Voltage : 1500V AC/minute
Contact Resistance : 10mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -40°C~+105°C

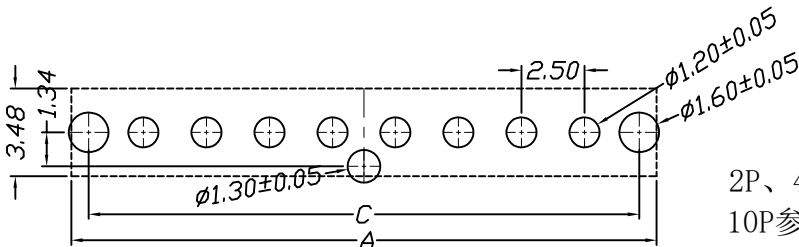

Recommended PCB pattern
THICKNESS=1.6 TO 2.4mm

2P、4P、6P、8P、
10P参考此图

Circuits Part No	Dimensions		
	A	B	C
2P	8.22	5.94	6.84
3P	10.72	8.44	9.34
4P	13.22	10.94	11.84
5P	15.72	13.44	14.34
6P	18.22	15.94	16.84
7P	20.72	18.44	19.34
8P	23.22	20.94	21.84
10P	28.22	25.94	26.84

Part No.			Material		Color	PIN Material	
42508W00-NP-B2-**			LCP		NATURAL	Brass/Gold&Ni-plated	
SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司地址: www.dgoonne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827			PART. NO: 42508W00-NP-B2-**	
APPROVED						DWG. NO: ENDE05	
DESIGNER			TITLE: MOLEX 2.5PH 单排直插板端带翼（本色）			REV: A0	
DRAWN	肖坤权	2021.05.30				SHEET: 1/1	

GENERAL TOLERANCES			
LINEAR		ANGLES	
0.0±0.35		X° REF±6°	
0.00±0.25		X° ±3°	
A0	新图面发行	2021.05.30	UNIT: MM
REV.	REVISION RECORD	DATE	SIZE: A4
0.000±0.15		X° X'±2°	