

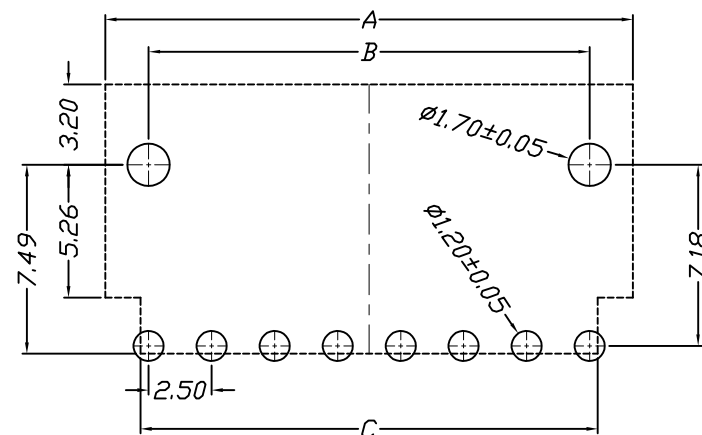
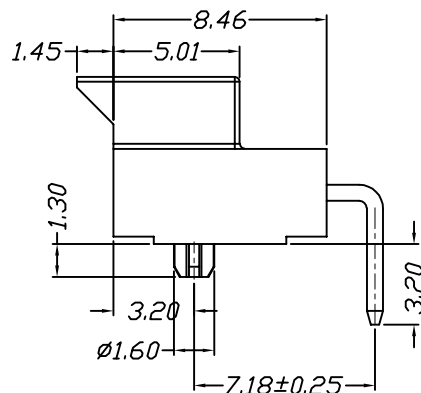


环保物料

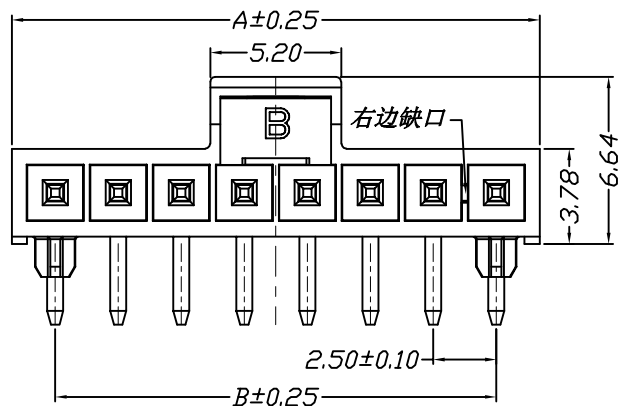

Recommended PCB pattern
THICKNESS=1.6 TO 2.4mm

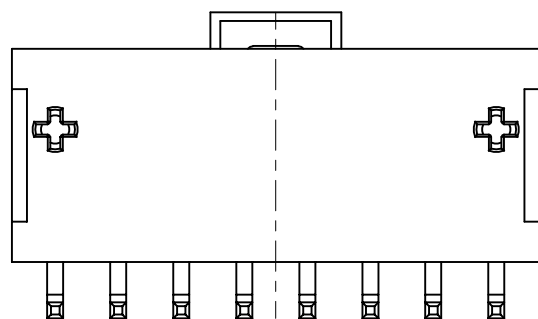

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 6.5A AC,DC
Withstand Voltage : 1500V AC/minute
Contact Resistance : 10mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -40°C~+105°C

Circuits Part No	Dimensions		
	A	B	C
2P	5.94	2.50	3.14
3P	8.44	5.00	5.64
4P	10.94	7.50	8.14
5P	13.44	10.00	10.64
6P	15.94	12.50	13.14
7P	18.44	15.00	15.64
8P	20.94	17.50	18.14
10P	25.94	22.50	23.14

Part No.			Material	Color	PIN Material	
42508W90-NPA-B3-**			LCP	NATURAL	Brass/Gold&Ni-plated	
SCALE: 1:1			NAME	DATE	PART. NO: 42508W90-NP-B3-**	
APPROVED					DWG. NO: ENDE05	
DESIGNER					REV: A0 SHEET: 1/1	
DRAWN			肖坤权	2021.05.30	TITLE: MOLEX 2.5PH 单排弯插板端 (本色)	

GENERAL TOLERANCES			UNIT: MM	SIZE: A4	
LINEAR	ANGLES				
0.0±0.35	X° REF±6°				
A0	新图面发行	2021.05.30		0.00±0.25	X° ±3°
REV.	REVISION RECORD	DATE		0.000±0.15	X° X'±2°

 东莞市康导新能源科技有限公司
DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD
公司网址: www.dgconne.cn 公司电话: 0769-85337633
邮 箱: 2850175988@qq.com 公司传真: 0769-85392827