

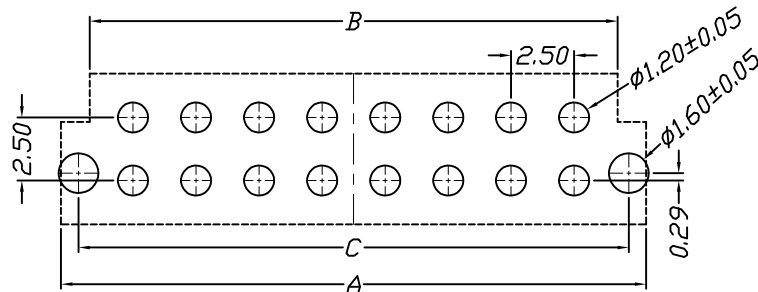
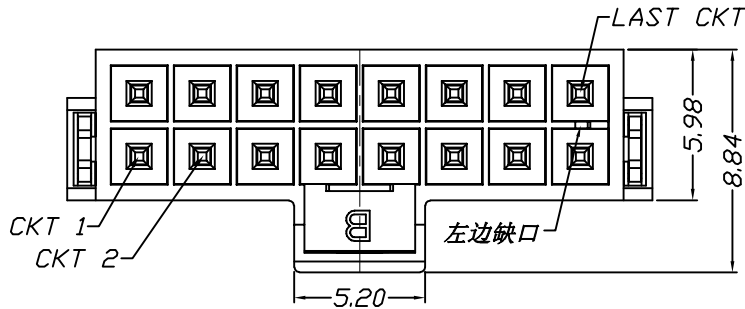
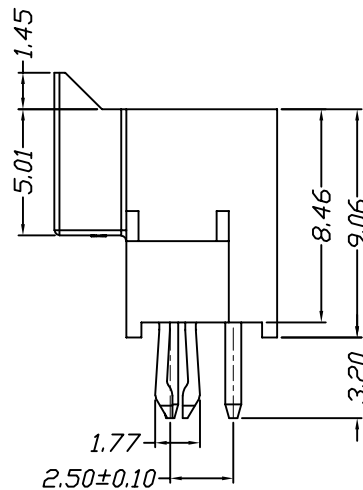


环保物料

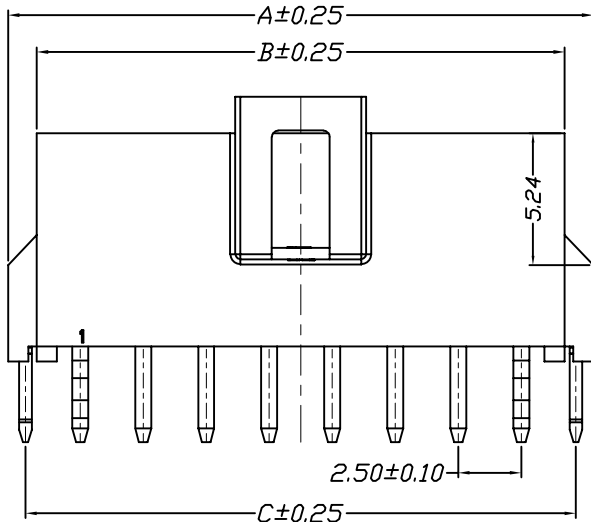

Recommended PCB pattern
THICKNESS=1.6 TO 2.4mm

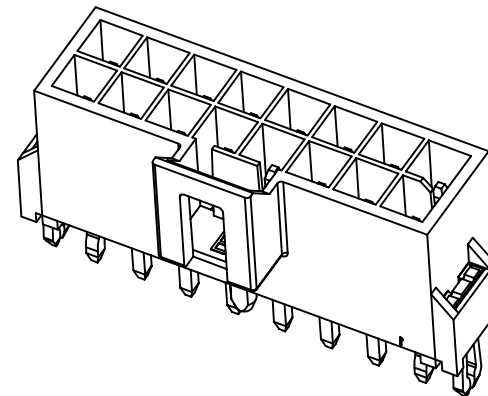

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 6.5A AC,DC
Withstand Voltage : 1500V AC/minute
Contact Resistance : 10mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -40°C~+105°C

Circuits Part No	Dimensions		
	A	B	C
2*2P	8.22	5.94	6.84
2*3P	10.72	8.44	9.34
2*4P	13.22	10.94	11.84
2*5P	15.72	13.44	14.34
2*6P	18.22	15.94	16.84
2*7P	20.72	18.44	19.34
2*8P	23.22	20.94	21.84
2*10P	28.22	25.94	26.84

						Part No.		Material		Color	PIN Material		
						42508W00-2*NP-B2-**		LCP		BLACK	Brass/Gold&Ni-plated		
				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司地址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175988@qq.com 公司传真: 0769-85392827			PART. NO: 42508W00-2*NPA-B2-**	
				LINEAR	ANGLES	APPROVED						DWG. NO:	
				0.0±0.35	X° REF±6°							ENDE05	
A0	新图面发行	2021.05.30		UNIT: MM	0.00±0.25	X° ±3°	DESIGNER			TITLE: MOLEX 2.5PH 双排直插板端带翼（黑色）			REV: A0
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	肖坤权	2021.05.30					