





环保物料

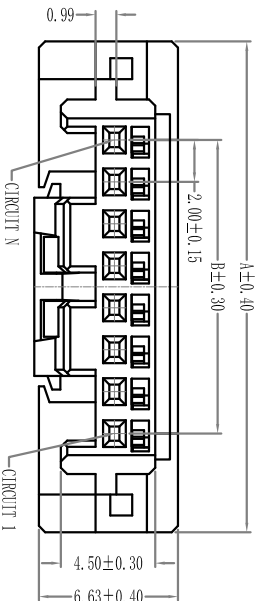




Specifications:
Voltage Rating : 50V AC/DC
Current Rating : 3.0A AC,DC(MIN.)
Withstand Voltage : 500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 50MΩ(MIN.)
Temperature Range : -40°C~+125°C



X轴
42015H00-1XNPA-X-PBT



Y轴
42015H00-1XNPA-Y-PBT

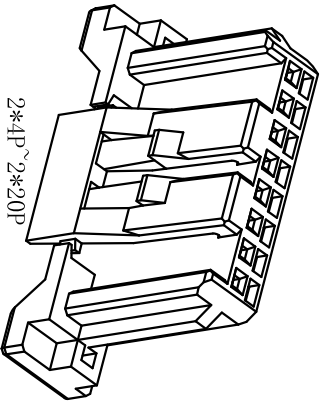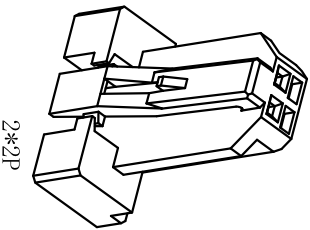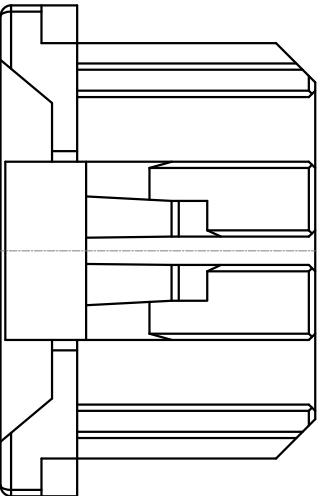

Circuit①Dimensions		
Part No	B	A
20P	38.00	47.40
18P	34.00	43.40
16P	30.00	39.40
14P	26.00	35.40
12P	22.00	31.40
10P	18.00	27.40
8P	14.00	23.40
6P	10.00	19.40
4P	6.00	15.40
2P	2.00	11.40

Part No.	Material	Color
42015H00-1XNPA-*-PBT	PBT	BLACK

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.25	X° REF±6°
	X° ±3°
	X° X'±2°

SCALE:	
1:1	
APPROVED	
DESIGNER	
DRAWN	

康导新能源

网址: www.kgdnn.com 电话: 0799-86837838

邮箱: 280017888@kq.com 传真: 0799-86826267

PART. NO:	42015H00-1XNPA-*-PBT
DWG. NO:	END05

REV.	REVISION RECORD	DATE	SIZE:	UNIT:	MM	0.00±0.15	X° ±3°	X° X'±2°	DRAWN	审核	2017.06.16
1											

TITLE:
2.00mm pitch Single Housing

REV:	A0	SHEET:	1/1
------	----	--------	-----