







环保物料

Specifications:

Voltage Rating : 250V AC/DC
Current Rating : 4.6A AC,DC
Withstand Voltage : 1500V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000V DC/1000MΩ(MIN.)
Temperature Range : -55°C~+105°C

2 circuits

4 circuits

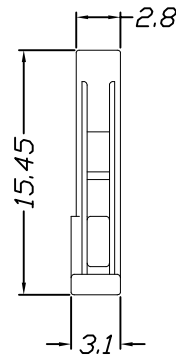

Material	Color
PBT,UL94V-0	Black

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgoonne.com 电话: 0769-86337633 邮箱: 2850175988@qq.com 传真: 0769-86392827	PART. NO: 43502H00-2XNP*-PT	
				LINEAR	ANGLES	APPROVED					
				0.0±0.35	X° REF±6°	DESIGNER				ENDE05	
新图面发行		2018.7.28		UNIT: MM	0.00±0.25	X° ±3°					TITLE: 3.50mm pitch Dual Housing
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	肖坤权	2018.7.28	REV: AO SHEET: 1/1		