





环保物料

Pin数	尺寸A	尺寸B
2×2	0.80	1.60
2×3	1.60	2.40
2×4	2.40	3.20
2×5	3.20	4.00
2×6	4.00	4.80
2×7	4.80	5.60
2×8	5.60	6.40
2×9	6.40	7.20
2×10	7.20	8.00
2×11	8.00	8.80
2×12	8.80	9.60
2×13	9.60	10.40
2×14	10.40	11.20
2×15	11.20	12.00
2×16	12.00	12.80
2×17	12.80	13.60
2×18	13.60	14.40
2×19	14.40	15.20
2×20	15.20	16.00
2×21	16.00	16.80
2×22	16.80	17.60
2×23	17.60	18.40
2×24	18.40	19.20
2×25	19.20	20.00
2×26	20.00	20.80
2×27	20.80	21.60
2×28	21.60	22.40
2×29	22.40	23.20
2×30	23.20	24.00
2×31	24.00	24.80
2×32	24.80	25.60
2×33	25.60	26.40
2×34	26.40	27.20
2×35	27.20	28.00
2×36	28.00	28.80
2×37	28.80	29.60
2×38	29.60	30.40
2×39	30.40	31.20
2×40	31.20	32.00
2×41	32.00	32.80
2×42	32.80	33.60
2×43	33.60	34.40
2×44	34.40	35.20
2×45	35.20	36.00
2×46	36.00	36.80
2×47	36.80	37.60
2×48	37.60	38.40
2×49	38.40	39.20
2×50	39.20	40.00

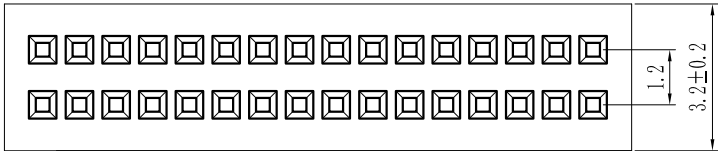

C
1.2
1.4

Specification:
Current Rating : 0.75AMP
Temperature Range : -40℃to+105℃
Contact Resistance : 30mΩ Max
Insulation Resistance : 1000MΩ Min
Withstanding Voltage : AC 500V
Material:
Insulator : Polyester (UL94V-0)
Standard:PA6T/LCP
Contact: Bronze
Plating : Au or Sn Over 50u" Ni

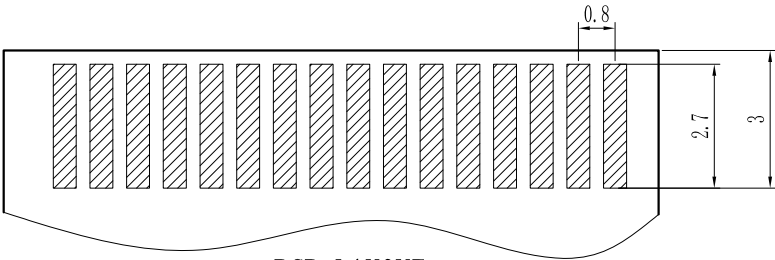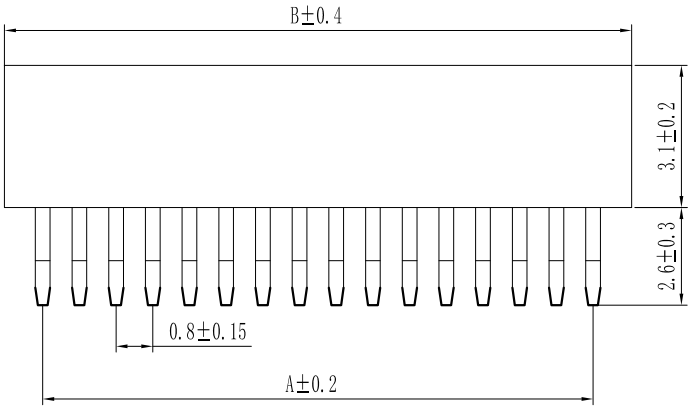

PCB LAYOUT
t=1.6/1.8

F 08 0L-XXX X X-XX-X-XXX				
①	②	③	④	⑤
① Series No: P=Pin Header F=Female Header B=Box Header E=Ejector Header	② Pitch: 08=0.80 10=1.00 12=1.27 20=2.00 25=2.54 39=3.96 50=5.08	③ Tail&Mounting Style: 90=Right Angle DIP Type 9S=Straight SMT Type 0D=Straight DIP Type 0S=Horizontal SMT Type 0L=Clip Type	④ No. of Pins: Single Row Double Row 101=1*1Pin 201=2*1Pin 102=1*2Pin 202=2*2Pin 140=1*40pin 240=2*40pin	⑤ Insulator Color: A:Black B:Brown C:Red D:Orange E:Yellow F:Green G:Blue H:Violet J:Gray K:White P:Light Blue
⑥ Material Type: A=PBT B-PA46 C-PA6T D-PA9T E-LCP	⑦ Plating Type: 0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au 0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u" 0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u" 0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u" 0D-Sn-Au 4u" 0I-Sn-Au 40u" 5D-Au 4u" 0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"	⑧ RoHS Request: 0:No Request 1:RoHS 2:HF(Halogen Free)	⑨ Customer Code	

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgconne.com 电话: 0769-85337633 邮箱: 2850175986@qq.com 传真: 0769-85392827	PART. NO: KDFH-0002		
				LINEAR	ANGLES					APPROVED	黎腾	2017. 06. 16
				0. 0 ± 0. 25	X° REF ± 6°							
A0	新图面发行	2017. 06. 16	UNIT: MM	0. 00 ± 0. 15	X° ± 3°	DESIGNER	肖坤权	2017. 06. 16		TITLE: 0. 8*1. 2mm Female Header, Dual Row, Plastic Height 3. 1mm, Clip Type(U)		
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000 ± 0. 08	X° X' ± 2°	DRAWN	旷淇	2017. 06. 16		REV: A0 SHEET: 1/1		