
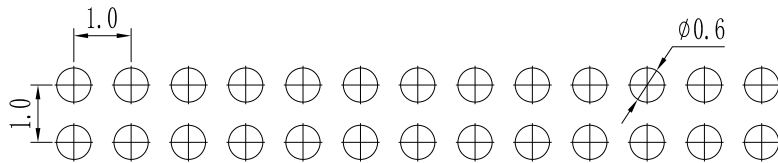
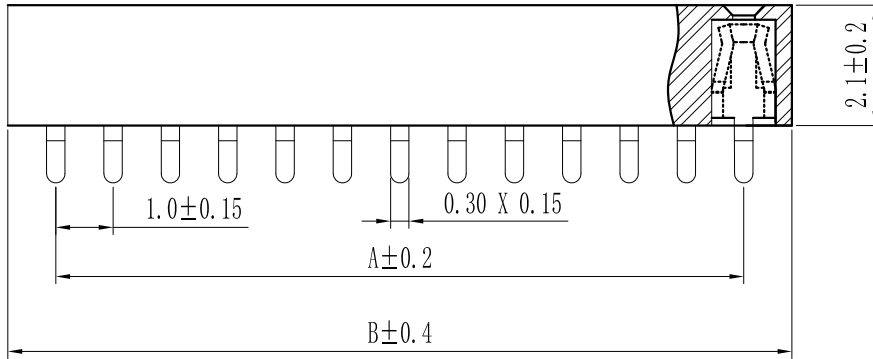


环保物料

Pin数	尺寸A	尺寸B
2×2	1.00	2.40
2×3	2.00	3.40
2×4	3.00	4.40
2×5	4.00	5.40
2×6	5.00	6.40
2×7	6.00	7.40
2×8	7.00	8.40
2×9	8.00	9.40
2×10	9.00	10.40
2×11	10.00	11.40
2×12	11.00	12.40
2×13	12.00	13.40
2×14	13.00	14.40
2×15	14.00	15.40
2×16	15.00	16.40
2×17	16.00	17.40
2×18	17.00	18.40
2×19	18.00	19.40
2×20	19.00	20.40
2×21	20.00	21.40
2×22	21.00	22.40
2×23	22.00	23.40
2×24	23.00	24.40
2×25	24.00	25.40
2×26	25.00	26.40
2×27	26.00	27.40
2×28	27.00	28.40
2×29	28.00	29.40
2×30	29.00	30.40
2×31	30.00	31.40
2×32	31.00	32.40
2×33	32.00	33.40
2×34	33.00	34.40
2×35	34.00	35.40
2×36	35.00	36.40
2×37	36.00	37.40
2×38	37.00	38.40
2×39	38.00	39.40
2×40	39.00	40.40
2×41	40.00	41.40
2×42	41.00	42.40
2×43	42.00	43.40
2×44	43.00	44.40
2×45	44.00	45.40
2×46	45.00	46.40
2×47	46.00	47.40
2×48	47.00	48.40
2×49	48.00	49.40
2×50	49.00	50.40

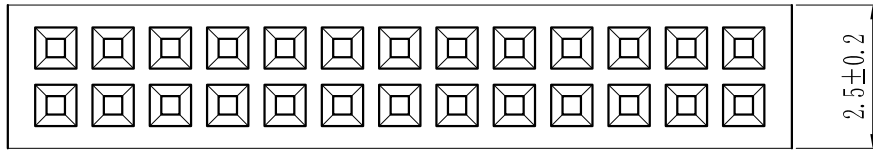

PCB LAYOUT

PC
1.5
1.8
2.0

Specification:

Current Rating : 1AMP

Temperature Range : -40℃to+105℃

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 500V

Material:

Insulator : Polyester (UL94V-0)

Standard:PBT/PA6T/LCP

Contact: Bronze

Plating : Au or Sn Over 50u" Ni

F 10 0D-XXX X X-XX-X-XXX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No: P=Pin Header F=Female Header B=Box Header E=Ejector Header	② Pitch: 08=0.80 10=1.00 12=1.27 20=2.00 25=2.54 39=3.96 50=5.08	③ Tail&Mounting Style: 90=Right Angle DIP Type 9S=Straight SMT Type 0D=Straight DIP Type 0S=Horizontal SMT Type	④ No. of Pins: Single Row Double Row 101=1*1Pin 201=2*1Pin 102=1*2Pin 202=2*2Pin 140=1*40pin 240=2*40pin	⑤ Insulator Color: A:Black B:Brown C:Red D:Orange E:Yellow F:Green G:Blue H:Violet J:Gray K:White P:Light Blue
⑥ Material Type: A=PBT B-PA46 C-PA6T D-PA9T E-LCP	⑦ Plating Type: 0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au 0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u" 0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u" 0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u" 0D-Sn-Au 4u" 0I-Sn-Au 40u" 5D-Au 4u" 0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"	⑧ RoHS Request: 0:No Request 1:RoHS 2:HF(Halogen Free)	⑨ Customer Code	

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES	APPROVED	黎腾	2017. 06. 16
				0. 0±0. 25	X° REF±6°			
A0	新图面发行	2017. 06. 16		UNIT: MM	0. 00±0. 15	X° ±3°	DESIGNER	肖坤权
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 08	X° X'±2°	DRAWN	旷淇	2017. 06. 16

 康 导 新 能 源
网址: www.dgconne.com 电话: 0769-85337633
邮箱: 2850175986@qq.com 传真: 0769-85392827

TITLE:
Pitch1.00mm Female Header, Dual Row,
Plastic Height 2.1mm, DIP(U)

PART. NO: KDFH-0007	
DWG. NO: ENDE1007	
REV: A0	SHEET: 1/1