

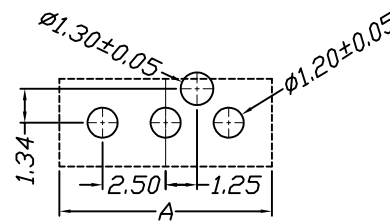
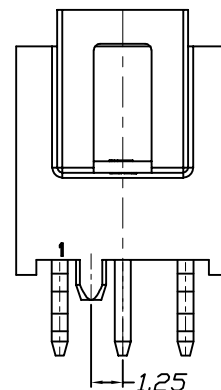


环保物料

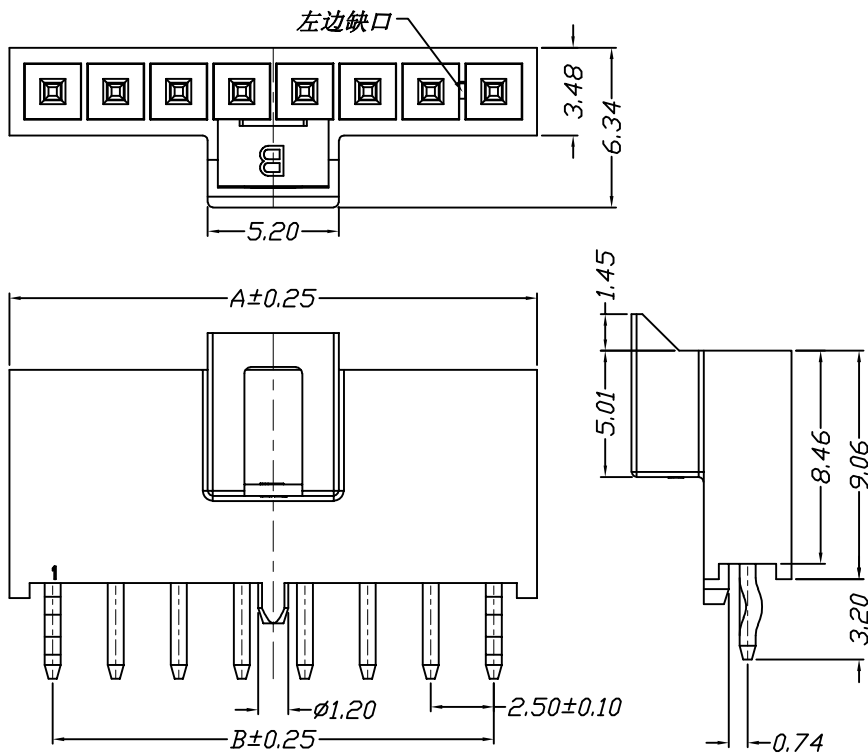

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 6.5A AC,DC
Withstand Voltage : 1500V AC/minute
Contact Resistance : 10mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -40°C~+105°C

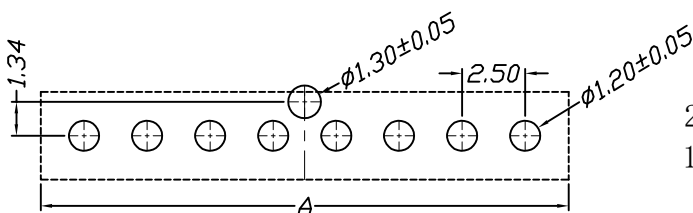

2P、4P、6P、8P、
10P参考此图

3P、5P、7P参考此图

Circuits Part No	Dimensions	
	A	B
2P	5.94	2.50
3P	8.44	5.00
4P	10.94	7.50
5P	13.44	10.00
6P	15.94	12.50
7P	18.44	15.00
8P	20.94	17.50
10P	25.94	22.50

Recommended PCB pattern
THICKNESS=1.6 TO 2.4mm

Part No.			Material		Color	PIN Material	
42508W00-NPA-B3-**			LCP		BLACK	Brass/Gold&Ni-plated	
SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175988@qq.com 公司传真: 0769-85392827			PART. NO: 42508W00-NPA-B3-**	
APPROVED						DWG. NO: ENDE05	
DESIGNER			TITLE: MOLEX 2.5PH 单排直插板端（黑色）			REV: A0	
DRAWN	肖坤权	2021.05.30				SHEET: 1/1	

				GENERAL TOLERANCES	
				LINEAR	ANGLES
				0.0±0.35	X° REF±6°
A0	新图面发行	2021.05.30	UNIT: MM	0.00±0.25	X° ±3°
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°