

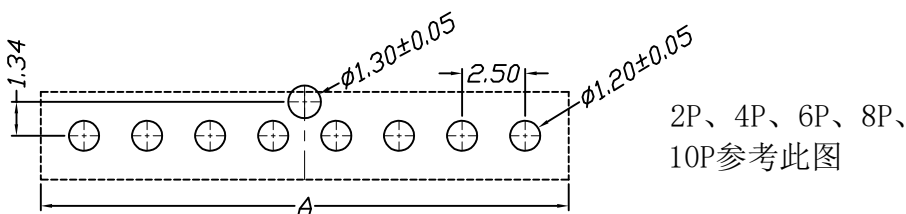
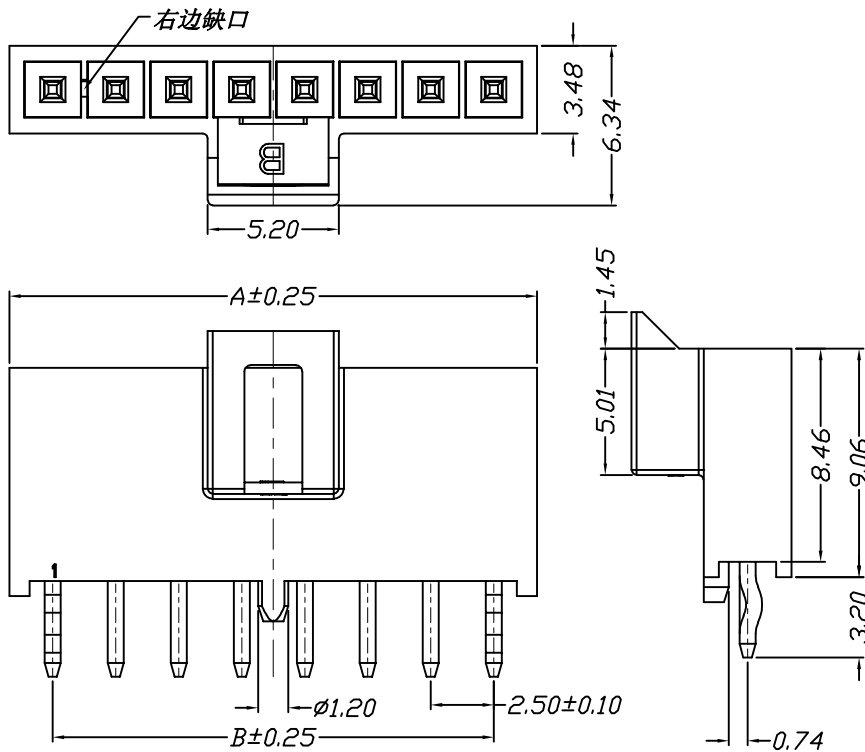


环保物料

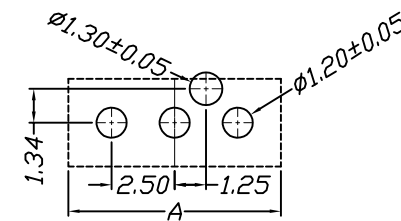

Recommended PCB pattern
THICKNESS=1.6 TO 2.4mm

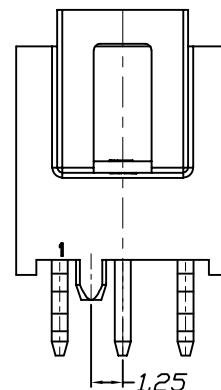

3P、5P、7P参考此图

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 6.5A AC,DC
Withstand Voltage : 1500V AC/minute
Contact Resistance : 10mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -40°C~+105°C

Circuits Part No	Dimensions	
	A	B
2P	5.94	2.50
3P	8.44	5.00
4P	10.94	7.50
5P	13.44	10.00
6P	15.94	12.50
7P	18.44	15.00
8P	20.94	17.50
10P	25.94	22.50

Part No.			Material		Color	PIN Material	
42508W00—NP—B3—**			LCP		NATURAL	Brass/Gold&Ni—plated	
SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175988@qq.com 公司传真: 0769-85392827			PART. NO: 42508W00—NP—B3—**	
APPROVED						DWG. NO:	
DESIGNER			TITLE: MOLEX 2.5PH 单排直插板端（本色）			ENDE05	
DRAWN	肖坤权	2021.05.30				REV: A0	