

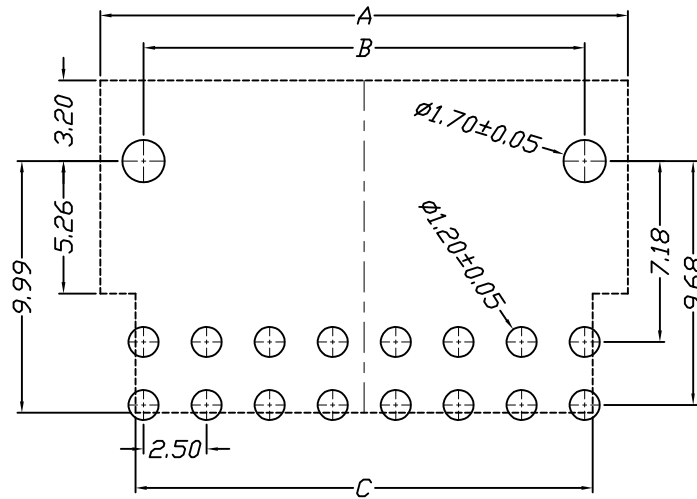
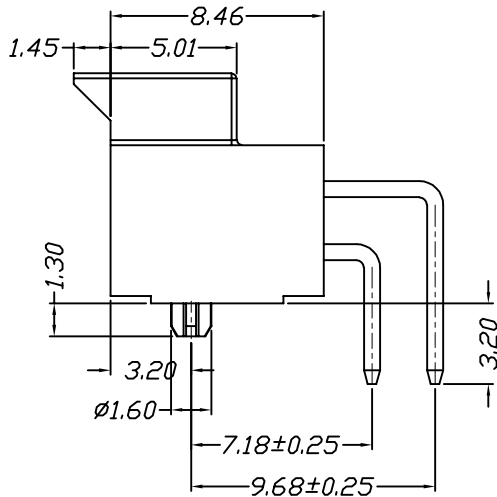
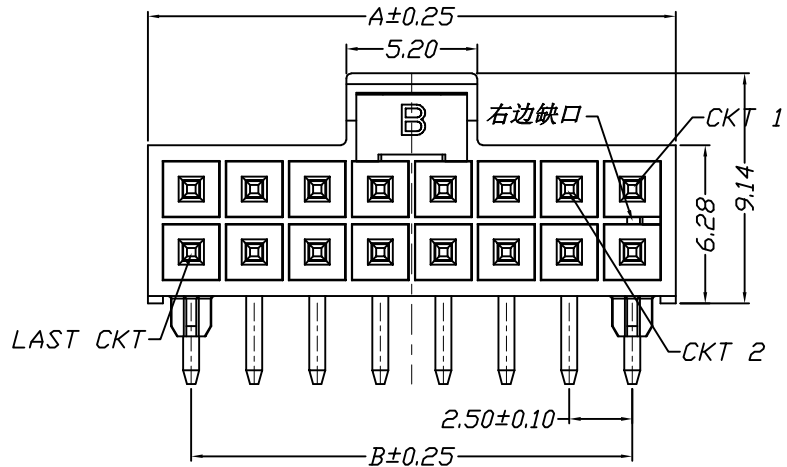


环保物料

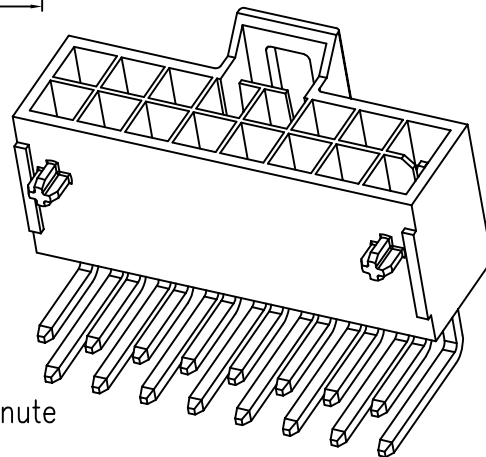

Recommended PCB pattern
THICKNESS=1.6 TO 2.4mm

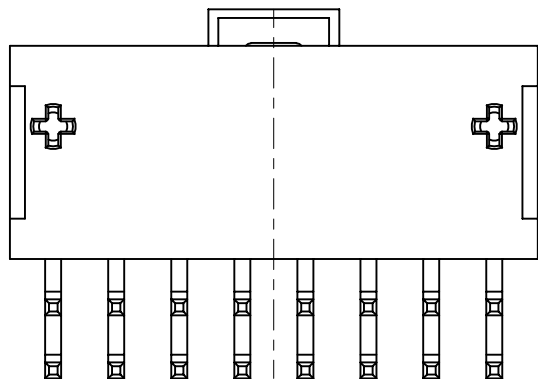

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 6.5A AC,DC
Withstand Voltage : 1500V AC/minute
Contact Resistance : 10mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -40°C~+105°C

Circuits Part No	Dimensions		
	A	B	C
2*2P	5.94	2.50	3.14
2*3P	8.44	5.00	5.64
2*4P	10.94	7.50	8.14
2*5P	13.44	10.00	10.64
2*6P	15.94	12.50	13.14
2*7P	18.44	15.00	15.64
2*8P	20.94	17.50	18.14
2*10P	25.94	22.50	23.14

Part No.			Material	Color	PIN Material	
42508W90-2*NP-B3-**			LCP	NATURAL	Brass/Gold&Ni-plated	
SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827		PART. NO: 42508W90-2*NP-B3-**	
APPROVED					DWG. NO: ENDE05	
DESIGNER						
DRAWN	肖坤权	2021.05.30	TITLE: MOLEX 2.5PH 双排弯插板端（本色）		REV: A0	SHEET: 1/1

				GENERAL TOLERANCES	
				LINEAR	ANGLES
				0.0±0.35	X° REF±6°
A0	新图面发行	2021.05.30	UNIT: MM	0.00±0.25	X° ±3°
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.15	X° X'±2°