

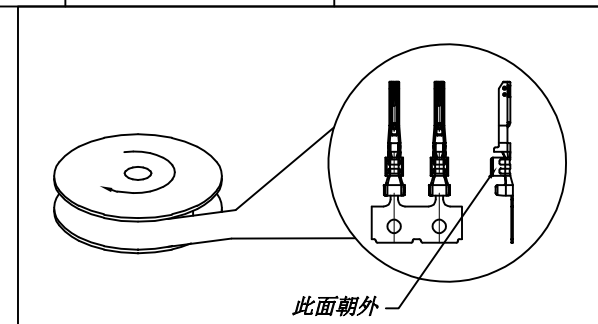


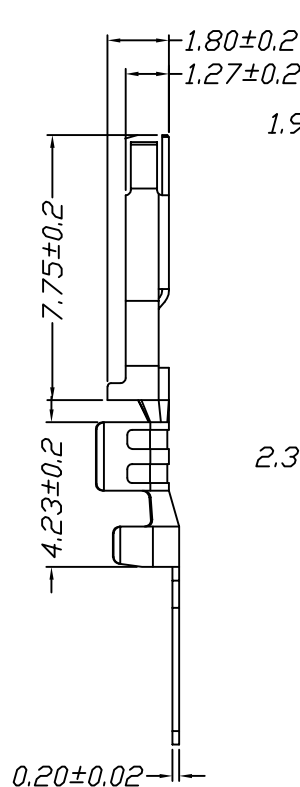


环保物料

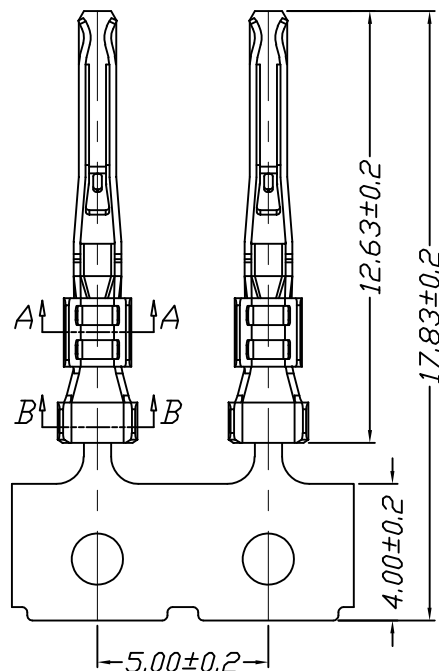

Specification技术规范:

Voltage Rating 额定电压: 250V AC/DC
Current Rating 额定电流: 6.5A AC/DC
Withand Voltage 耐电压: 1500V AC/Minute
Contact Resistance 接触电阻: 10mΩ Max
Insulation Resistance 绝缘电阻: ---
Temperature Range 工作温度: -40°C~+105°C
Plating 电镀: Light Tin over Nickel 底层镀镍, 表面镀亮锡
Ni 镍: 30-60um
Tin 锡: 100um min



Wire Range	Insulation O.D.	Material	Finish	Qty/reel
AWG #20~#22	1.80mm(max)	C7025 COPPER	Sn&Ni-plated	7500 pcs

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康 导 新 能 源 网址: www.dgconne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART. NO: 42508T2G-SN	
				LINEAR	ANGLES	APPROVED	黎腾	2021. 09. 01		DWG. NO:	
				0. 0±0. 50	X° REF±6°						
AO	新图面发行	2021. 09. 01	UNIT: MM	0. 00±0. 30	X° ±3°	DESIGNER	肖坤权	2021. 09. 01		TITLE: PH2. 5MM L12. 63MM AWG20-22# U端弹片式 C7025铜镀亮锡	
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 20	X° X'±2°	DRAWN	黄薇	2021. 09. 01			
										REV: A0	SHEET: 1/1