

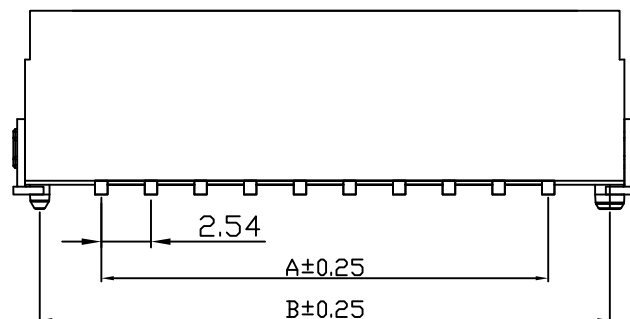



环保物料

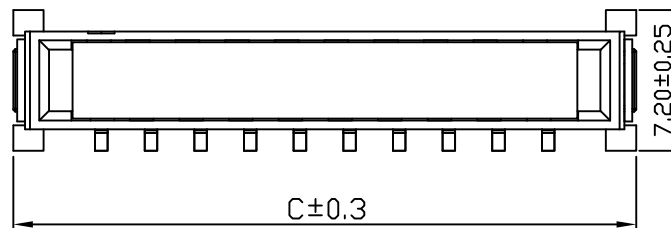

Specifications:
Voltage Rating : 250V AC/DC
Current Rating : 8A AC,DC
Withstand Voltage : 1000V AC/minute
Contact Resistance : 20mΩ(MAX.)
Insulation Resistance : 1000MΩ(MIN.)
Temperature Range : -55°C~+150°C

Unit: mm

Part No.	Dimensions		
	A	B	C
1*2P	2.54	8.84	11.54
1*3P	5.08	11.38	14.08
1*4P	7.62	13.92	16.62
1*5P	10.16	16.46	19.16
1*6P	12.70	19.00	21.70
1*7P	15.24	21.54	24.24
1*8P	17.78	24.08	26.78
1*9P	20.32	26.62	29.32
1*10P	22.86	29.16	31.86

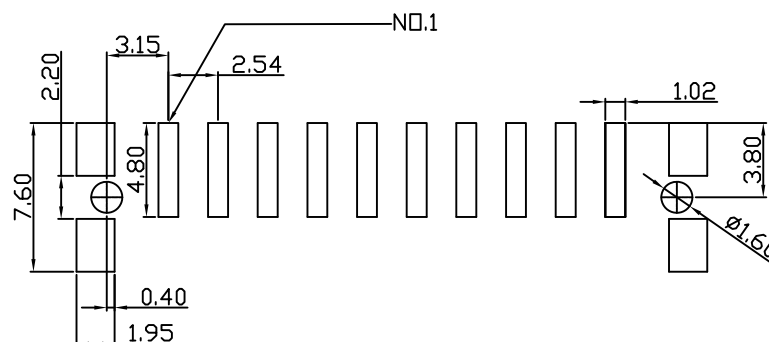

Recommended PCB Layout

Material	Color	PIN Material
LCP, UL94V-0	Black	Brass

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 康导新能源 网址: www.dgoonne.com 电话: 0769-853377633 邮箱: 2850175986@qq.com 传真: 0769-853922827	PART. NO: 42542W00-1xNPA-A2-RS
				LINEAR	ANGLES	APPROVED	黎腾	2017. 06. 16		DWG. NO: ENDE05
				0. 0±0. 25	X° REF±6°					
A0	新图面发行	2017. 06. 16	UNIT: MM	0. 00±0. 15	X° ±3°	DESIGNER	肖坤权	2017. 06. 16		TITLE: <i>2. 54mm pitch Single Wafer</i>
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 08	X° X'±2°	DRAWN	旷淇	2017. 06. 16		