
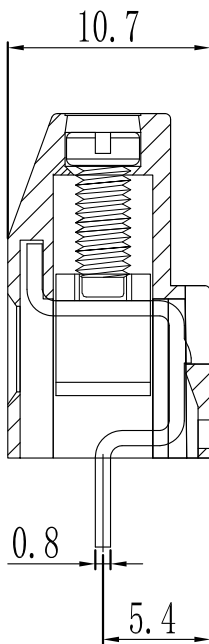
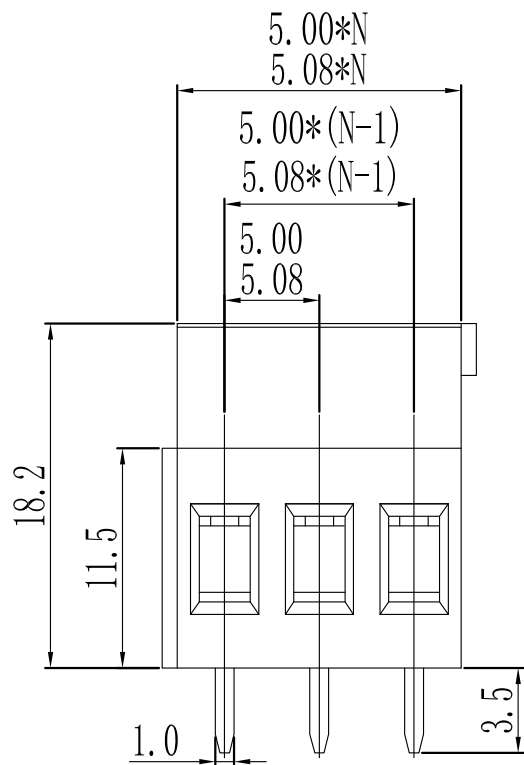


环保物料

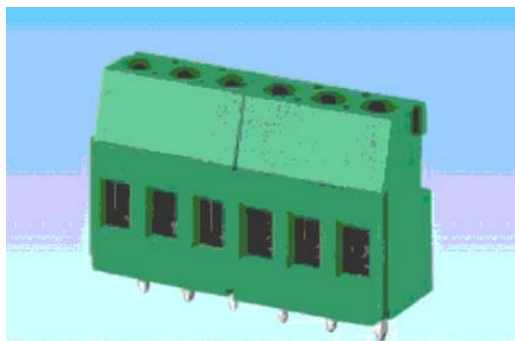

N=Number of Contacts

| | | |
|-------|-----------------------|--------------------------------|
| 产品型号 | MODEL | KD129C |
| 材质&电镀 | MATERIAL&PLATING | |
| 螺丝 | Screw | M3.0, 钢, 镀锌 steel, Zinc Plated |
| 弹片 | Reed | 黄铜, 镀镍 Brass, Ni plated |
| 焊针 | Pin header | 黄铜, 镀锡 Brass, Tin plated |
| 塑件 | Housing | PA66, UL94V-0 |
| 电气性能 | ELECTRICAL | UL IEC |
| 额定电压 | Rated voltage | 300V 250V |
| 额定电流 | Rated current | 20A 20A |
| 接触电阻 | Contact resistance | 20mΩ |
| 绝缘电阻 | Insulation resistance | 500MΩ/1000V |
| 耐电压 | Withstanding voltage | AC2000V/1min |
| 使用线径 | Wire range | 24-12AWG 4.0mm ² |
| 机械性能 | MECHANICAL | |
| 温度范围 | Temp. range | -40℃~+105℃ |
| 瞬时温度 | Max. soldering | +250℃, 5sec |
| 扭矩 | Torque | 0.5N.m 4.4Lb.in |
| 剥线长度 | Strip length | 6-7mm |

| | | | | | | | | | | | |
|------|-----------------|------------|----------|--------------------|----------|----------|------|------------|---|--|------------|
| | | | | GENERAL TOLERANCES | | SCALE: | NAME | DATE | 康导新能源 网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850176888@qq.com 传真: 0769-85392827 | PART. NO: | KDTB0054 |
| | | | | LINEAR | ANGLES | 1:1 | 黎腾 | 2017.06.16 | | DWG. NO: | |
| A0 | 新图面发行 | 2017.06.16 | UNIT: MM | 0.00±0.25 | X° ±3° | DESIGNER | 肖坤权 | 2017.06.16 | TITLE: | Pitch 5.00/5.08mm Euro Terminal Blocks | |
| REV. | REVISION RECORD | DATE | SIZE: A4 | 0.000±0.15 | X° X'±2° | DRAWN | 旷淇 | 2017.06.16 | REV: | A0 | SHEET: 1/1 |