
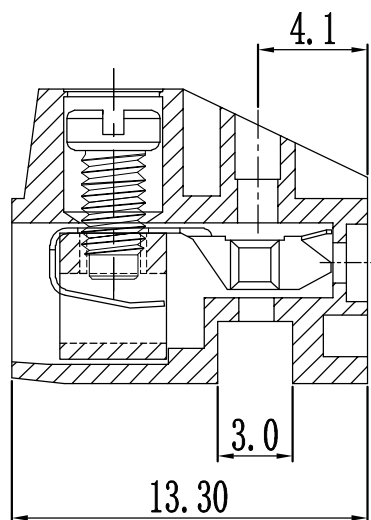
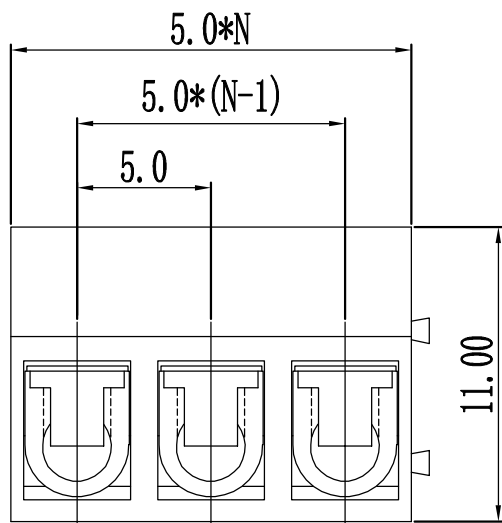


# 环保物料

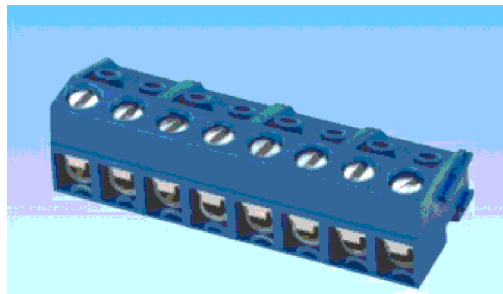

N=Number of Contacts

|       |                       |                             |                            |
|-------|-----------------------|-----------------------------|----------------------------|
| 产品型号  | MODEL                 | KD332                       |                            |
| 材质&电镀 | MATERIAL&PLATING      |                             |                            |
| 螺丝    | Screw                 | M2.5, 钢, 镀锌                 | steel, Zinc Plated         |
| 弹片    | Reed                  | 磷青铜, 镀镍                     | Phosphor Bronze, Ni plated |
| 焊针    | Pin header            | -                           |                            |
| 塑件    | Housing               | PBT, UL94V-0                |                            |
| 电气性能  | ELECTRICAL            | UL                          | IEC                        |
| 额定电压  | Rated voltage         | 300V                        | 250V                       |
| 额定电流  | Rated current         | 10A                         | 12A                        |
| 接触电阻  | Contact resistance    | 20mΩ                        |                            |
| 绝缘电阻  | Insulation resistance | 500MΩ/1000V                 |                            |
| 耐电压   | Withstanding voltage  | AC2000V/1min                |                            |
| 使用线径  | Wire range            | 28-16AWG 1.5mm <sup>2</sup> |                            |
| 机械性能  | MECHANICAL            |                             |                            |
| 温度范围  | Temp. range           | -40℃~+105℃                  |                            |
| 瞬时温度  | Max. soldering        | +250℃, 5sec                 |                            |
| 扭矩    | Torque                | 0.4N.m 3.5Lb.in             |                            |
| 剥线长度  | Strip length          | 5-6mm                       |                            |

|      |                 |            |          |                    |          |               |      |            |  |                       |            |
|------|-----------------|------------|----------|--------------------|----------|---------------|------|------------|--|-----------------------|------------|
|      |                 |            |          | GENERAL TOLERANCES |          | SCALE:<br>1:1 | NAME | DATE       | <b>康导新能源</b><br>网址: www.dgconne.com 电话: 0769-85337633<br>邮箱: 2850175888@qq.com 传真: 0769-85392827 | PART. NO:<br>KDTB0014 |            |
|      |                 |            |          | LINEAR             | ANGLES   | APPROVED      | 黎腾   | 2017.06.16 |  | DWG. NO:              |            |
| AO   | 新图面发行           | 2017.06.16 | UNIT: MM | 0.00±0.25          | X° ±3°   | DESIGNER      | 肖坤权  | 2017.06.16 | TITLE:<br>Pitch 5.00mm Euro Terminal Blocks  | REV: A0               | SHEET: 1/1 |
| REV. | REVISION RECORD | DATE       | SIZE: A4 | 0.000±0.15         | X° X'±2° | DRAWN         | 旷淇   | 2017.06.16 |  |                       |            |