
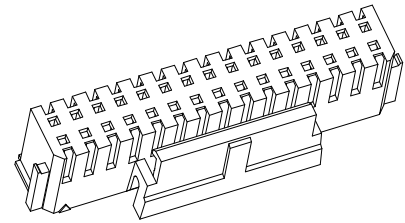
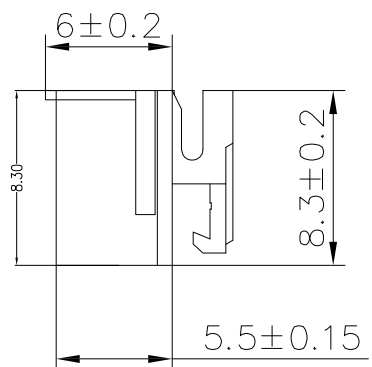
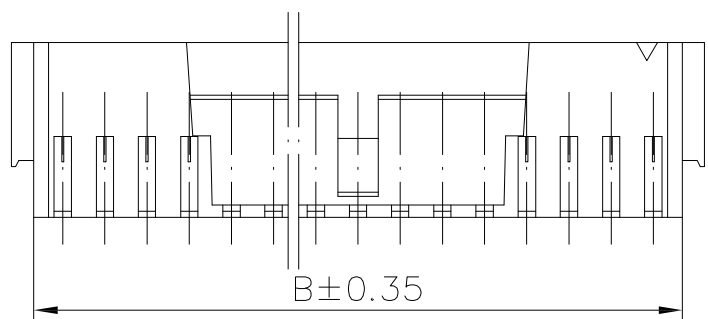


环保物料

### 主要技术参数 Main Specifications

- 线 数 (Poles): 04 to 60
- 接触电阻 (Contact resistance):  $\leq 30m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 3.0A AC DC
- 耐 电压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

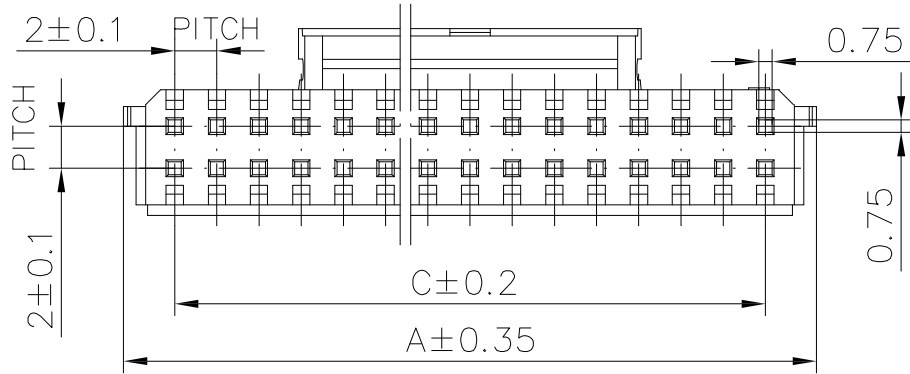

Circuits	Dimensions (mm)		
	A	B	C
2*2	7.00	4.70	2.00
2*3	9.00	6.70	4.00
2*4	11.00	8.70	6.00
2*5	13.00	10.70	8.00
2*6	15.00	12.70	10.00
2*7	17.00	14.70	12.00
2*8	19.00	16.70	14.00
2*9	21.00	18.70	16.00
2*10	23.00	20.70	18.00
2*11	25.00	22.70	20.00
2*12	27.00	24.70	22.00
2*13	29.00	26.70	24.00
2*14	30.00	28.70	26.00
2*15	32.00	30.70	28.00
~	~	~	~
2*30	62.00	60.70	58.00

A	HOUSING	1 PCS	PA66	94-V0
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	<b>康 导 新 能 源</b> 网址: www.dgoonne.com 电话: 0769-85337633 邮箱: 2850175988@qq.com 传真: 0769-85392827	PART. NO: 22004T	
LINEAR	ANGLES	APPROVED	黎腾	2017.06.16			
0.0±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16		DWG. NO:	
0.00±0.25	X° ±3°	DRAWN	旷淇	2017.06.16		REV: A0 SHEET: 1/1	
REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	0.000±0.15	X° X'±2°	TITLE: 2.00mmPITCH HOUSING