

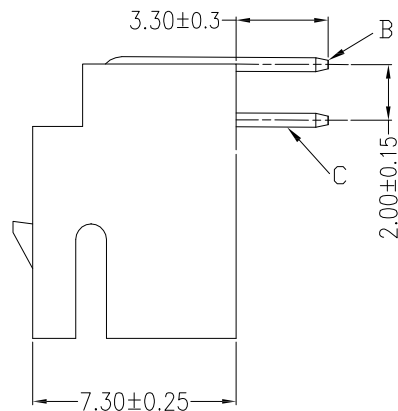
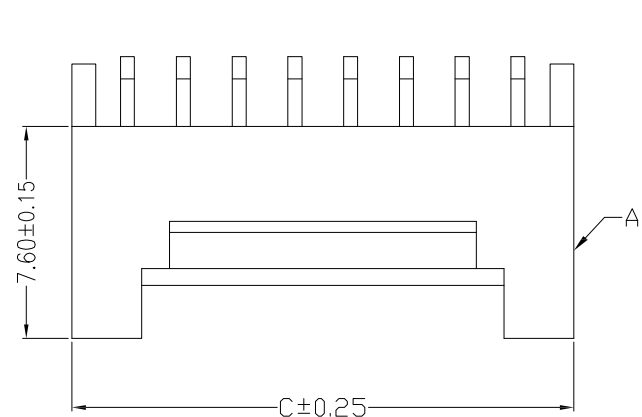


环保物料

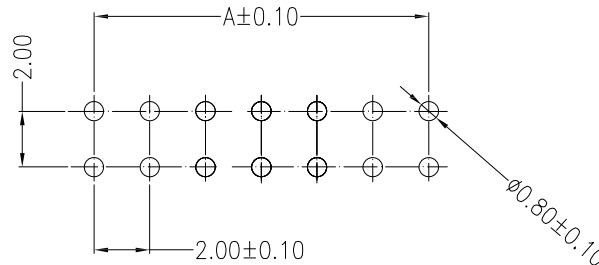

主要技术参数 Main Specifications

- 线数 (Poles): 04 to 30
- 接触电阻 (Contact resistance): $\leq 30m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 3.0A AC DC
- 耐电压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

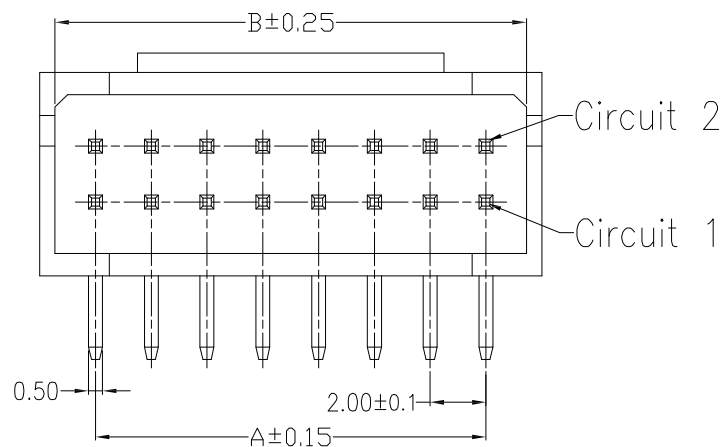

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

Circuits	Dimensions (mm)		
	DIM. A	DIM. B	DIM. C
2*2	2.00	4.90	6.00
2*3	4.00	6.90	8.00
2*4	6.00	8.90	10.00
2*5	8.00	10.90	12.00
2*6	10.00	12.90	14.00
2*7	12.00	14.90	16.00
2*8	14.00	16.90	18.00
2*9	16.00	18.90	20.00
2*10	18.00	20.90	22.00
2*11	20.00	22.90	24.00
2*12	22.00	24.90	26.00
2*13	24.00	26.90	28.00
2*14	26.00	28.90	30.00
2*15	28.00	30.90	32.00

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C	CONTACT	2~15 PCS	Brass	Sn-plated
B	CONTACT	2~15 PCS	Brass	Sn-plated
A	HOUSING	1 PCS	PA66	94-V0

GENERAL TOLERANCES		SCALE:	NAME	DATE	康导新能源 康导: www.dgonne.com 电话: 0769-85337633 邮箱: 2850176988@qq.com 传真: 0769-85392827	PART. NO: 22004AWD			
LINEAR	ANGLES	1:1	APPROVED	黎腾			DWG. NO:		
0.00±0.35	X° REF±6°	DESIGNER	肖坤权	2017.06.16					
0.00±0.25	X° ±3°	DRAWN	旷淇	2017.06.16					
REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	0.000±0.15	X° X'±2°	TITLE: 2.00mmPITCH 90° WAFER DIP TYPE	REV: A0	SHEET: 1/1